
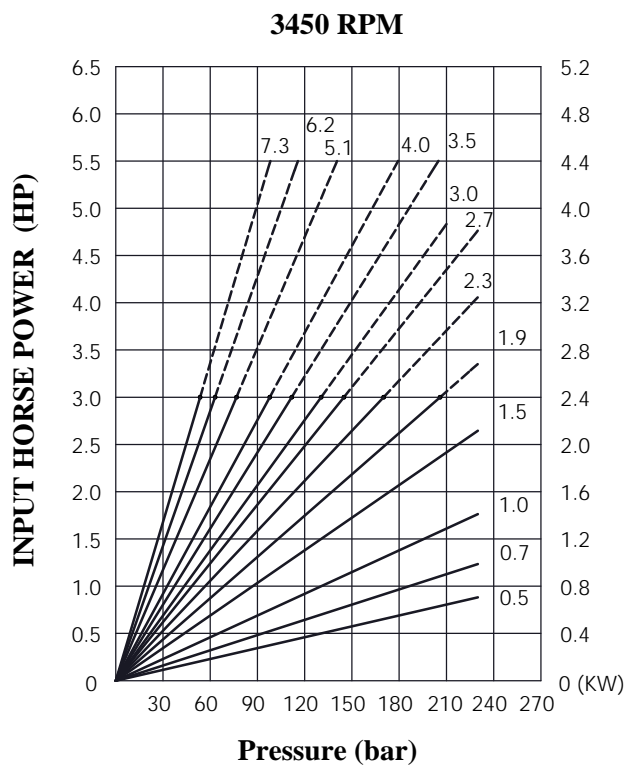
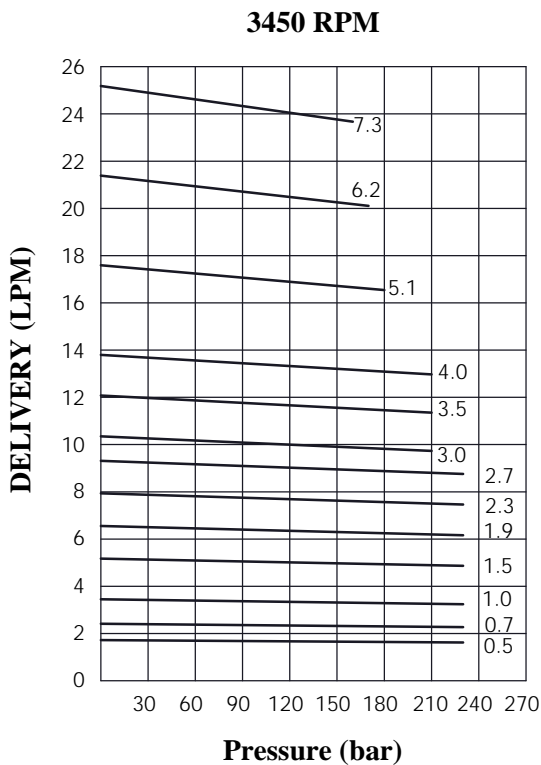
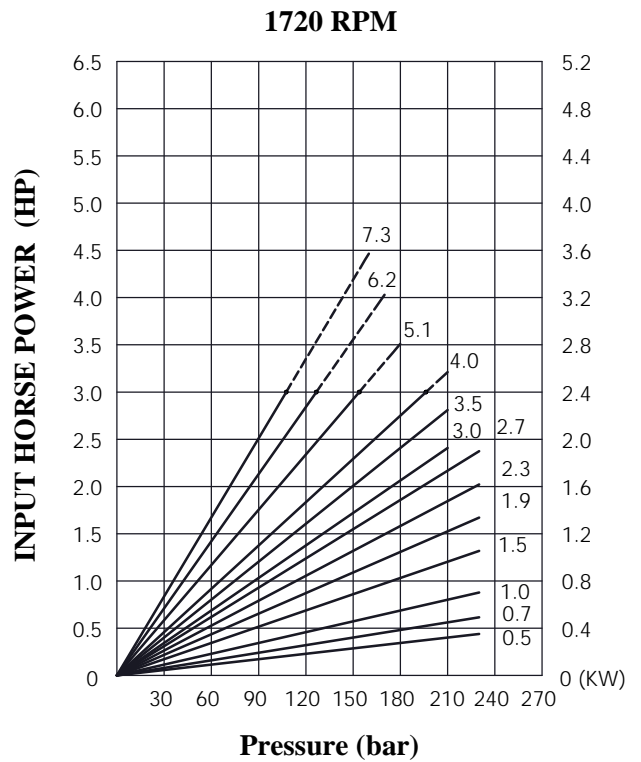


Available in a range of powers up to 3.0 HP for single and 3 phase voltage supply with pump displacements of 0.5~7.3 cc/rev. Packs can be supplied with a large selection of oil reservoir configurations and capacities.

TESTING CONDITIONS

0.5 ~ 7.3 C.C. Pumps

OIL VISCOSITY : 46 CST
OIL TEMPERATURE : 40°C

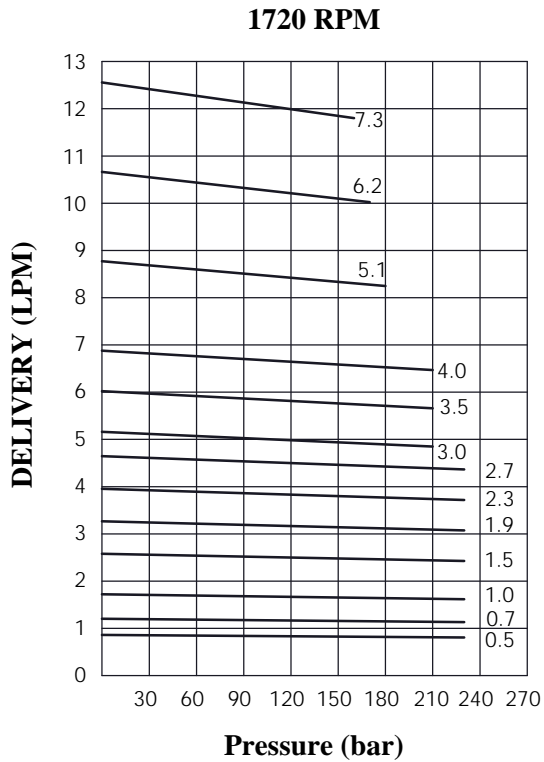

*High-Torque Motors' Performance Curves, Please Consult Our Sales Department.