


TECHNICAL DATA		
Max. Setting:	420	bar
Rated flow:	200	l/min
Cavity-Tooling:	3A-2	
Installation torque:	60-70	Nm
Weight:	0.25 (Z:L)	kg
Will accept maximum pressure at port 2; suitable for use in cross port relief circuits. If used in cross port relief circuits, consider spool leakage.		

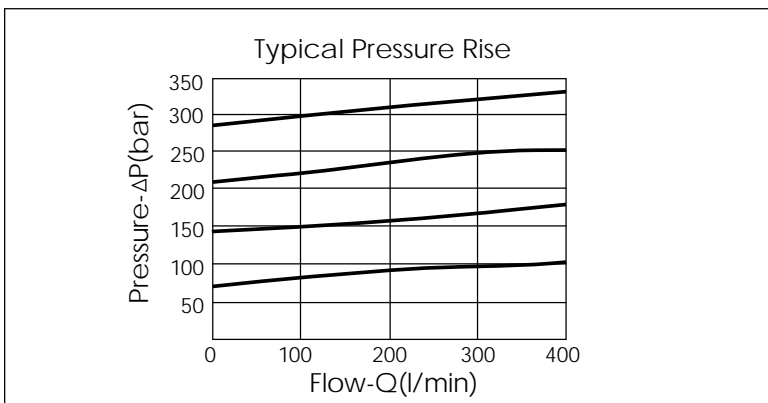

X	OPERATION
22	Pilot Operated 1 to 2 (P to T)
<ul style="list-style-type: none"> <li>Response Time-Typical (2 ms)</li> <li>Maximum Leakage (50 cc/min./70 bar) (46 cSt, 40°C)</li> </ul>	

Y	SPRINGS	
	ADJUSTMENT RANGES	
A	7-210 bar	(70 bar Standard Setting)
B	3.5-105 bar	(70 bar Standard Setting)
C	10.5-420 bar	(70 bar Standard Setting)
D	1.7-55 bar	(28 bar Standard Setting)
E	1.7-28 bar	(14 bar Standard Setting)
N	4-55 bar	(28 bar Standard Setting)
Q	4-28 bar	(14 bar Standard Setting)
W	10.5-315 bar	(70 bar Standard Setting)

Z	OPTIONS	
L	Leakproof hex. socket screw.	
K	Handknob with Lock Konb.	
C	Stainless Steel Tamper Resistant Cover.	