

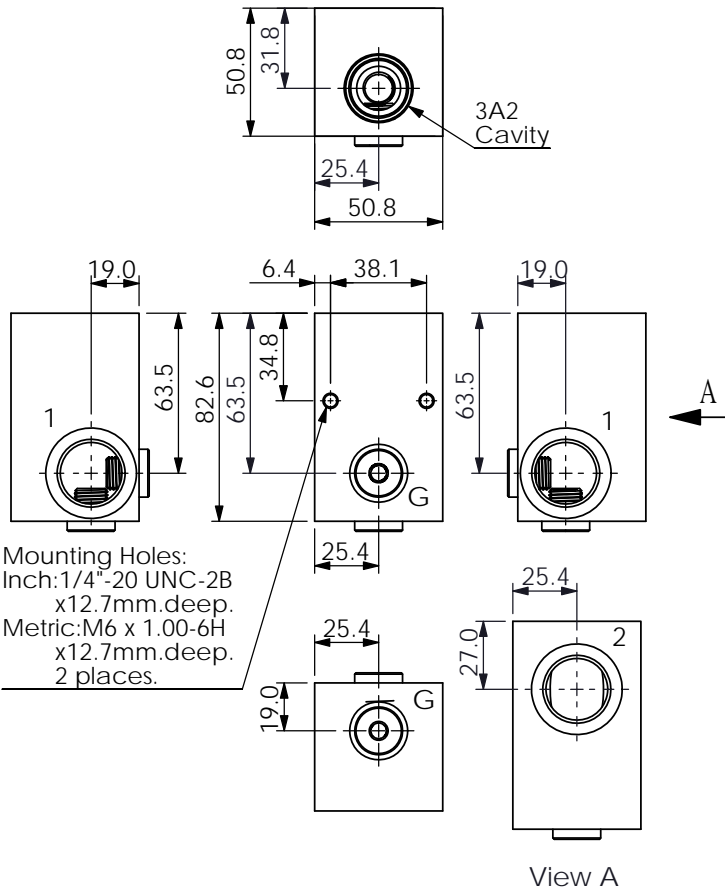


Ordering Code: **ML-3A2-X-Y 02-Z**

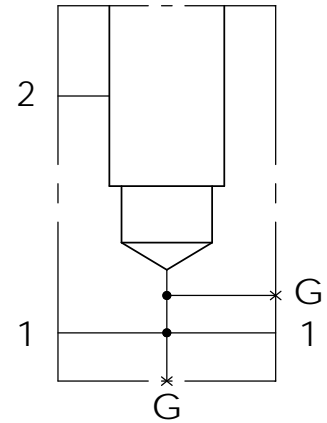

Mounting Holes:
Inch: 1/4"-20 UNC-2B
x12.7mm.deep.
Metric: M6 x 1.00-6H
x12.7mm.deep.
2 places.

UNIT:mm



TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar
Ductile Iron
Body Pressure Rating: 350 bar

Cavity:

Refer to 3A2

* Refer to Winner Cartridge Valves Catalog.

| | |
|----------|-------------------------|
| Aluminum | 0.42 kg(WITHOUT VALVES) |
|----------|-------------------------|

| | |
|--------------|-------------------------|
| Ductile Iron | 1.32 kg(WITHOUT VALVES) |
|--------------|-------------------------|

* If you need the special specification.
Please contact us.

PORT SIZE

| X | PORT SIZE | | |
|-------------|-----------|---------|--|
| | PORTS | PORT | |
| | 1,2 | G | |
| G06G | G 3/4" | G 1/4" | |
| S08G | SAE 8 | 1/4"NPT | |
| S10G | SAE 10 | 1/4"NPT | |
| S12G | SAE 12 | 1/4"NPT | |

Y BODY MATERIAL

A HIGH-STRENGTH ALUMINUM

S DUCTILE IRON

Z CARTRIDGE VALVES SELECTION

WITHOUT VALVE

RP0A RP3A20AL(200 LPM,7-210 bar)

RD5A RD3A25AL(200 LPM,35-210 bar)

The selection is only example. Please refer to Winner Cartridge Program and to select the appropriate valves and manifolds assembly in accordance with request function (flow \ pressure \ ... etc.)