
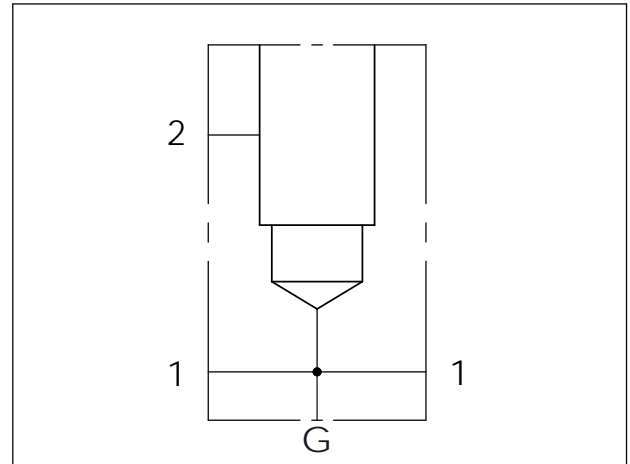


Ordering Code: **ML-16A2-X-Y 02-Z**

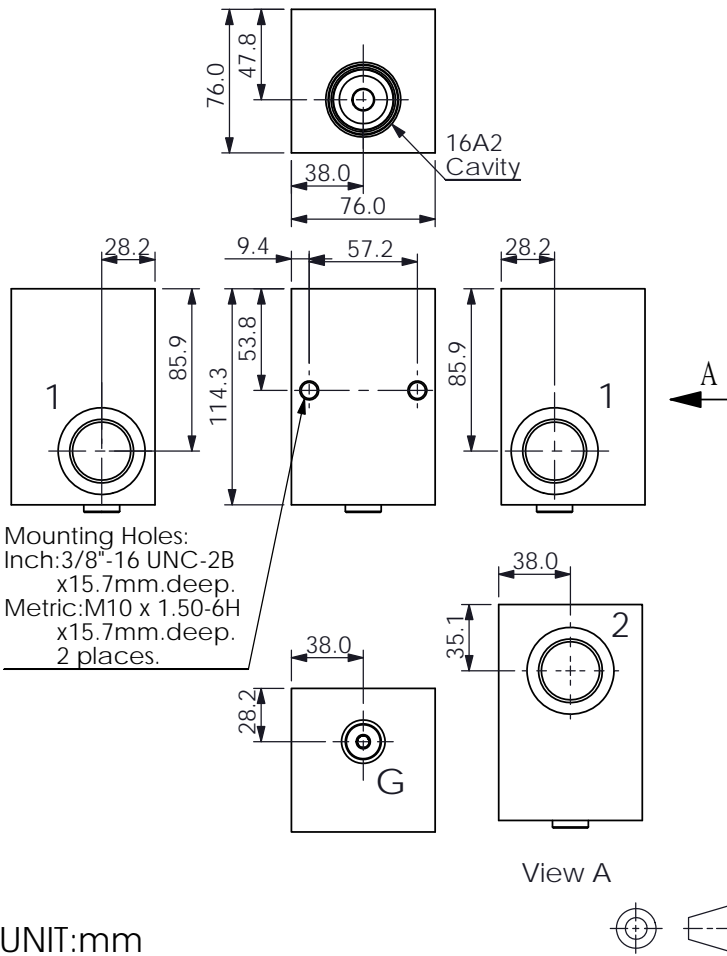

TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar
 Ductile Iron Body Pressure Rating: 350 bar

Cavity:

Refer to 16A2

* Refer to Winner Cartridge Valves Catalog.

Aluminum	1.4 kg(WITHOUT VALVES)
Ductile Iron	3.9 kg(WITHOUT VALVES)

* If you need the special specification. Please contact us.

X	PORT SIZE		
	PORTS	PORT	
	1,2	G	
G06G	G 3/4"	G 1/4"	
G08G	G 1"	G 1/4"	
G10G	G 1-1/4"	G 1/4"	
S12G	SAE 12	1/4"NPT	

Y	BODY MATERIAL
A	HIGH-STRENGTH ALUMINUM
S	DUCTILE IRON

Z	CARTRIDGE VALVES SELECTION
	WITHOUT VALVE
RP0A	RP16A20AL(380 LPM,7~210 bar)

The selection is only example. Please refer to Winner Cartridge Program and to select the appropriate valves and manifolds assembly in accordance with request function (flow 、 pressure 、 ... etc.)