

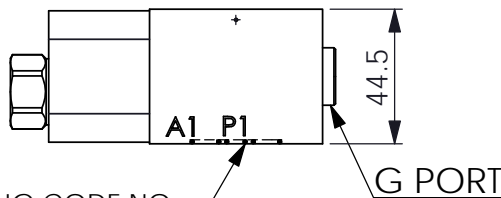


Ordering Code: **MH03CAW-X-Y-Z 01**
 Stack Height : 44.5mm

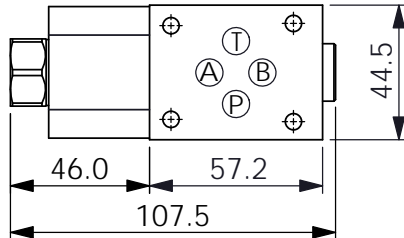

O-RING CODE NO.
4KAA012AA001

UNIT:mm

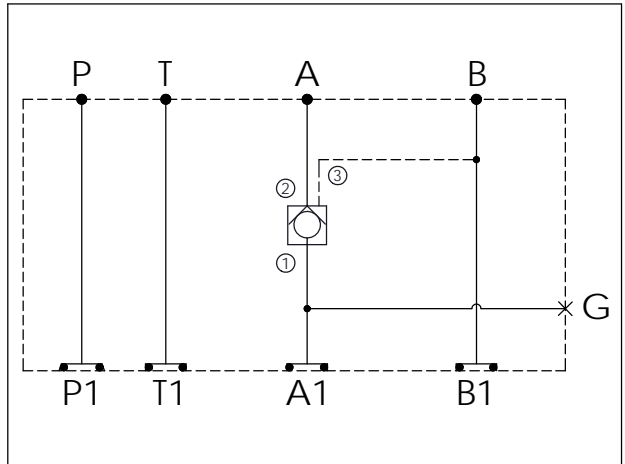

TECHNICAL DATA

Aluminum Body Pressure Rating: 250 bar
 Ductile Iron Body Pressure Rating: 350 bar

Rated flow: 40 l/min


Cartridge Valve:

Refer to CO11A-X-Y-Z

* Refer to Winner Cartridge Valve Catalog.

Aluminum	0.4 kg(WITHOUT VALVE)
	0.55 kg(INCLUDE VALVE)
Ductile Iron	1.1 kg(WITHOUT VALVE)
	1.25 kg(INCLUDE VALVE)

* If you need the special specification. Please contact us.

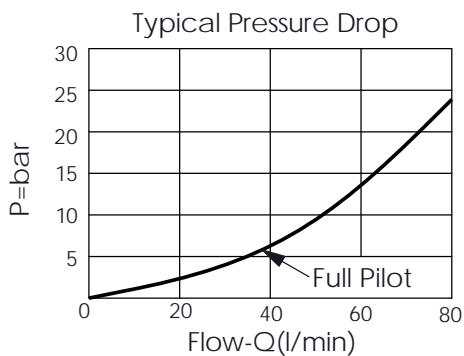

X SELECTION FOR A PORT CONTROL

11A3	CAVITY ONLY(WITHOUT VALVE)	
CO20	CO11A3020N (60LPM,2.0bar)	
CO03	CO11A3003N (60LPM,0.3bar)	
CO50	CO11A3050N (60LPM,5.0bar)	

Y SELECTION FOR G PORT

G02	G 1/4"(Metric)	
N02	NPT 1/4"(U.S. Units)	

Z BODY MATERIAL

A	HIGH-STRENGTH ALUMINUM	
S	DUCTILE IRON	