



ISO 03 SANDWICH MANIFOLD

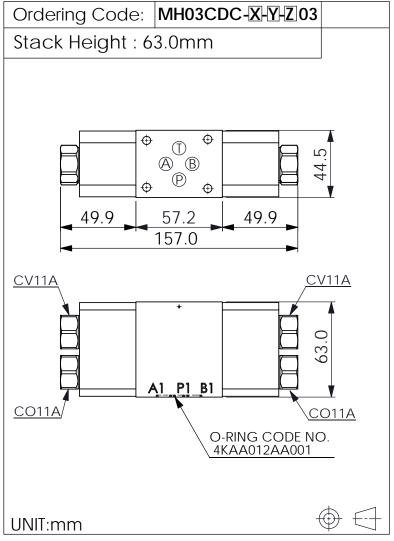



TECHNICAL DATA

Aluminum Body Pressure Rating: 250 bar

Ductile Iron

Body Pressure Rating: 350 bar

Rated flow: 40 I/min

Cartridge Valve: Refer to CV11A2020N CO11A-X-Y-Z

* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.75 kg(WITHOUT VALVES) 1.35 kg(INCLUDE VALVES)

* If you need the special specification. Please contact us.

Pressure 25	Free Flow or Piloted Open (CO11A3020N) Pressure Drop
Flow-Q(I/min)	0 20 40 60 80

X	SELECTION FOR A PORT CONTROL	
11A3	CAVITY ONLY(WITHOUT VALVE)	
CO20	CO11A3020N (60LPM,2.0bar)	

Υ	SELECTION FOR B PORT CONTROL	
11A3	CAVITY ONLY(WITHOUT VALVE)	
CO20	CO11A3020N (60LPM,2.0bar)	

Z	BODY MATERIAL	
Α	HIGH-STRENGTH ALUMINUM	

Rev.170324 M.CDC.372