


Ordering Code: **MH05CDW-X-Y-Z 01**

Stack Height : 49.5mm

UNIT:mm

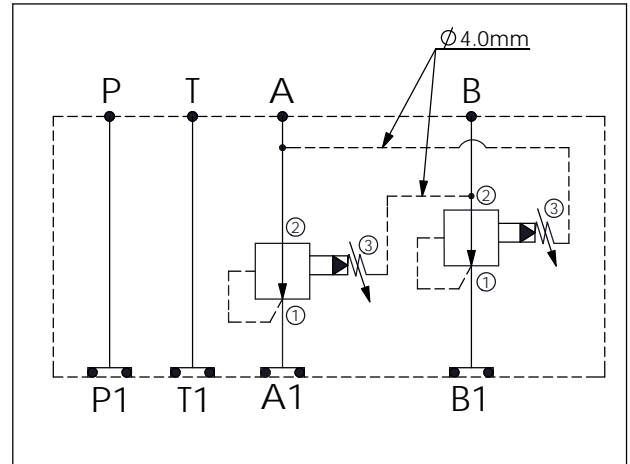

TECHNICAL DATA


Aluminum Body Pressure Rating: 250 bar
 Ductile Iron Body Pressure Rating: 350 bar

Rated flow: 80 l/min

Cartridge Valve:
 Refer to PB2A-X-Y-Z
 * Refer to Winner Cartridge Valves Catalog.

Aluminum	0.85 kg(WITHOUT VALVES) 1.4 kg(INCLUDE VALVES)
Ductile Iron	2.4 kg(WITHOUT VALVES) 2.95 kg(INCLUDE VALVES)

* If you need the special specification. Please contact us.

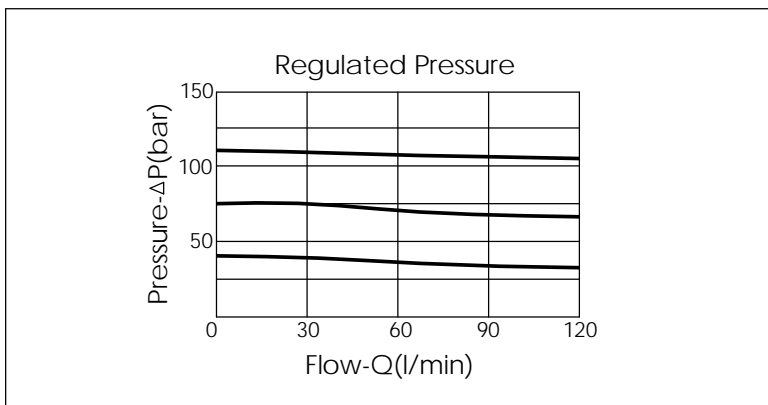

X	SELECTION FOR A PORT CONTROL	
2A3	CAVITY ONLY(WITHOUT VALVE)	
PB0A	PB2A30AL (80LPM ,7-210bar)	

Y	SELECTION FOR B PORT CONTROL	
2A3	CAVITY ONLY(WITHOUT VALVE)	
PB0A	PB2A30AL (80LPM ,7-210bar)	

Z	BODY MATERIAL	
A	HIGH-STRENGTH ALUMINUM	
S	DUCTILE IRON	