

ISO 05 SANDWICH MANIFOLD

Ordering Code: **MH05CDW-X-Y-Z 01**


Stack Height : 49.5mm

Dimensions: 63.0mm height, 79.7mm, 76.2mm, 79.7mm, and 235.6mm total length.

Port locations: P, T, A, B, P1, T1, A1, B1.

O-RING CODE NO. 4KAA014AA001

UNIT:mm

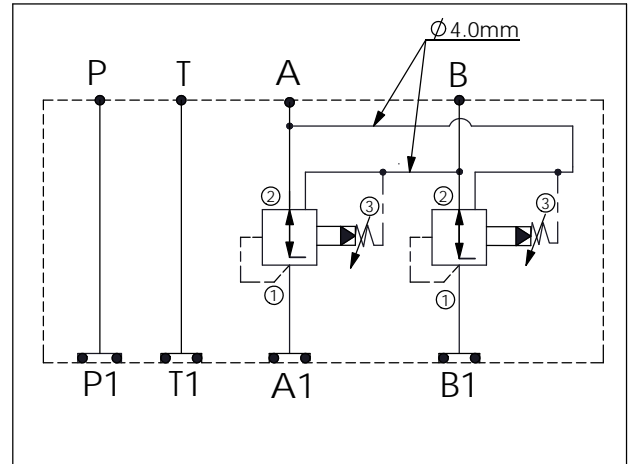

TECHNICAL DATA


Aluminum Body Pressure Rating: 250 bar
 Ductile Iron Body Pressure Rating: 350 bar

Rated flow: 80 l/min

Cartridge Valve:
 Refer to PP2A-X-Y-Z
 * Refer to Winner Cartridge Valves Catalog.

Aluminum	0.85 kg(WITHOUT VALVES) 1.4 kg(INCLUDE VALVES)
Ductile Iron	2.4 kg(WITHOUT VALVES) 2.95 kg(INCLUDE VALVES)

* If you need the special specification. Please contact us.

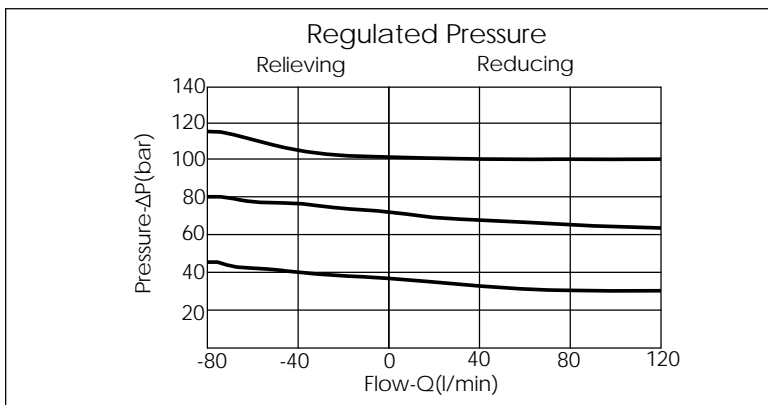

X	SELECTION FOR A PORT CONTROL	
2A3	CAVITY ONLY(WITHOUT VALVE)	
PP0A	PP2A30AL(80LPM,7.0~210bar) (Pilot Operated Reducing/Relieving)	

Y	SELECTION FOR B PORT CONTROL	
2A3	CAVITY ONLY(WITHOUT VALVE)	
PP0A	PP2A30AL(80LPM,7.0~210bar) (Pilot Operated Reducing/Relieving)	

Z	BODY MATERIAL	
A	HIGH-STRENGTH ALUMINUM	
S	DUCTILE IRON	