


Ordering Code: **MH05CDW-X-Y-Z 21**

Stack Height : 49.5mm

O-RING CODE NO.
4KAA014AA001

UNIT:mm

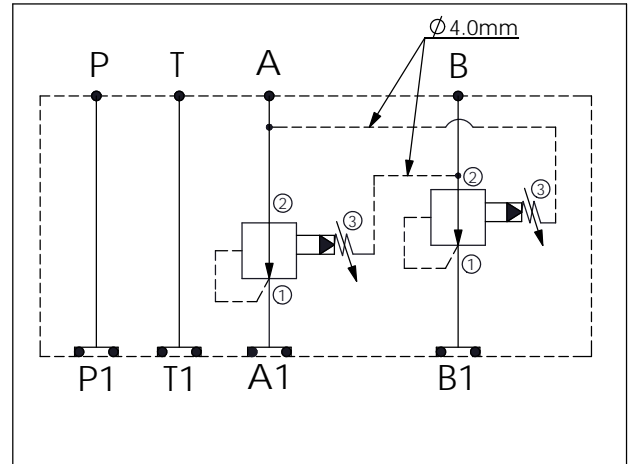

TECHNICAL DATA


Aluminum Body Pressure Rating: 250 bar
 Ductile Iron Body Pressure Rating: 350 bar

Rated flow: 40 l/min

Cartridge Valve:
 Refer to PB11A-X-Y-Z
 * Refer to Winner Cartridge Valves Catalog.

Aluminum	0.95 kg(WITHOUT VALVES)
	1.3 kg(INCLUDE VALVES)

* If you need the special specification.
 Please contact us.

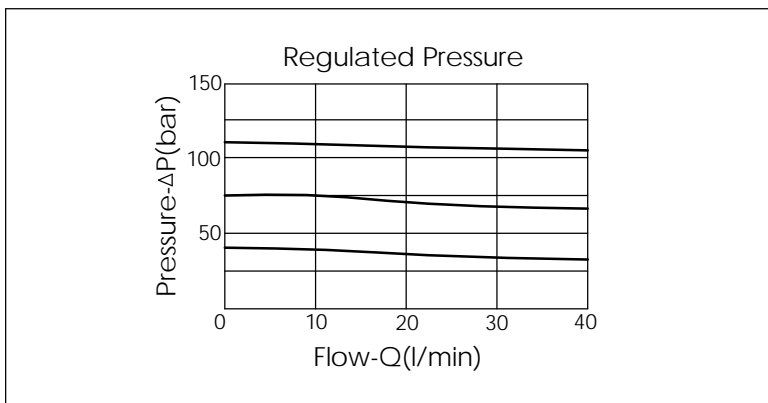

X	SELECTION FOR A PORT CONTROL	
11A3	CAVITY ONLY(WITHOUT VALVE)	
PB0A	PB11A30AL (40LPM ,7-210bar)	

Y	SELECTION FOR B PORT CONTROL	
11A3	CAVITY ONLY(WITHOUT VALVE)	
PB0A	PB11A30AL (40LPM ,7-210bar)	

Z	BODY MATERIAL	
A	HIGH-STRENGTH ALUMINUM	