


Ordering Code:	<b>MH03ERW-X-Y-Z03</b>
Stack Height :	63.0mm


O-RING CODE NO.  
4KAA012AA001

UNIT:mm

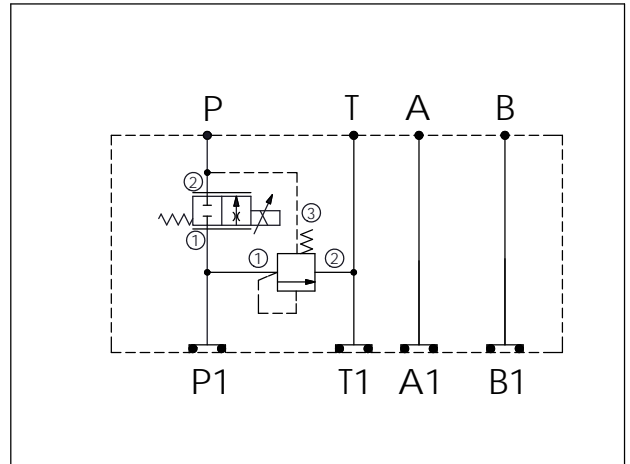

TECHNICAL DATA	
Aluminum Body Pressure Rating:	250 bar
Ductile Iron Body Pressure Rating:	350 bar
Rated flow:	40 l/min
Cartridge Valve:	Refer to LR11A-X-Y-Z PFC13A-X-Y-Z
* Refer to Winner Cartridge Valves Catalog.	
Aluminum	0.63 kg(WITHOUT VALVES) 1.2 kg(INCLUDE VALVES ,WITHOUT COIL)

\* If you need the special specification. Please contact us.

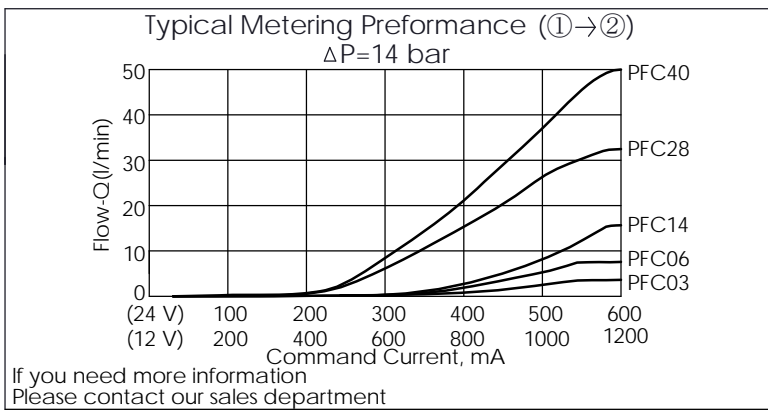

Y	SELECTION FOR FLOW CONTROL VALVE (REFER TO PFC13A-X-Y-Z)
<b>13A2</b>	CAVITY ONLY(WITHOUT VALVE)
<b>PFC03</b>	PFC13A2D0030N(0.3~3LPM)
<b>PFC06</b>	PFC13A2D0060N(0.4~6LPM)
<b>PFC14</b>	PFC13A2D0140N(0.6~14LPM)
<b>PFC28</b>	PFC13A2D0280N(0.8~28LPM)
<b>PFC40</b>	PFC13A2D0400N(1.0~40LPM)

COIL MUST BE ORDERED SEPARATELY  
(REFER TO EC-19A-X-Y-Z)

X	SELECTION FOR COMPENSATOR
<b>11A3</b>	CAVITY ONLY(WITHOUT VALVE)
<b>LR140</b>	LR11A30140N(60LPM,14.0bar)

Z	BODY MATERIAL
<b>A</b>	HIGH-STRENGTH ALUMINUM