

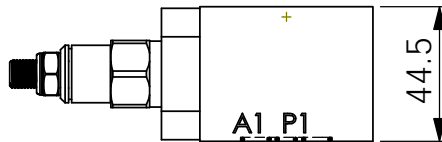


Ordering Code: **MH03FAO-X-Y-Z01**
 Stack Height : 44.5mm

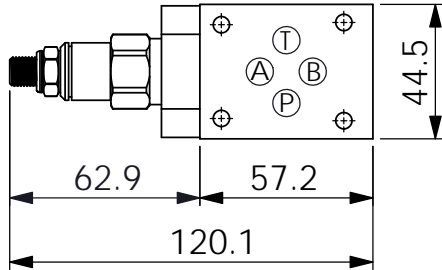

O-RING CODE NO.
4KAA012AA001

UNIT:mm

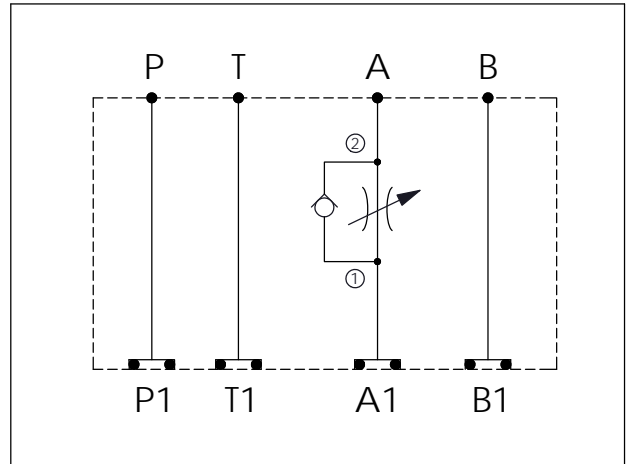

TECHNICAL DATA

Aluminum Body Pressure Rating: 250 bar

Ductile Iron Body Pressure Rating: 350 bar

Rated flow: 40 l/min



Cartridge Valve:

Refer to NC13A-X-Y-Z

* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.35 kg(WITHOUT VALVE)
	0.5 kg(INCLUDE VALVE)

* If you need the special specification. Please contact us.

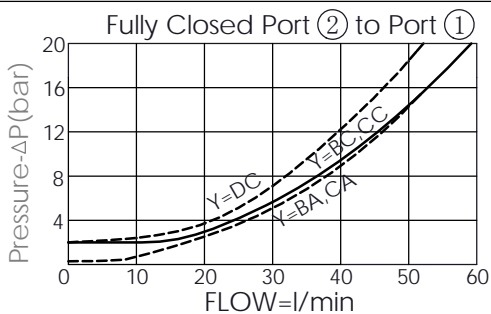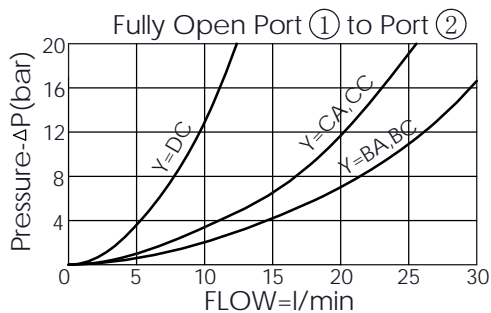

X SELECTION FOR A PORT CONTROL

13A2	CAVITY ONLY(WITHOUT VALVE)
NCBA	NC13A21BAL (20LPM,0.3bar)
NCBC	NC13A21BCL (20LPM,2.0bar)

Z BODY MATERIAL

A	HIGH-STRENGTH ALUMINUM
----------	------------------------

Y SELECTION FOR B PORT CONTROL

N WITHOUT PORT