
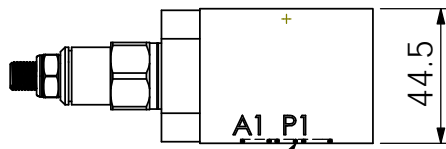




Ordering Code: **MH03FAO-X-Y-Z01**

Stack Height : 44.5mm

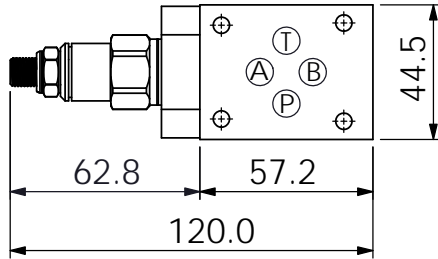

O-RING CODE NO.  
4KAA012AA001

UNIT:mm

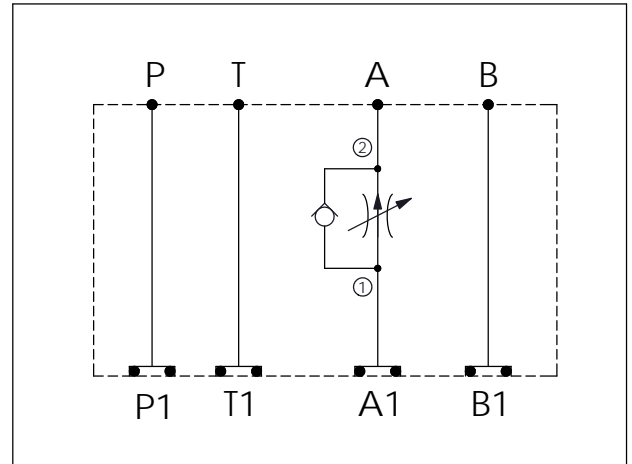

### TECHNICAL DATA

Aluminum Body Pressure Rating: 250 bar

Ductile Iron

Body Pressure Rating: 350 bar

Rated flow: 23 l/min  
(Pressure Compensated)


Cartridge Valve:  
Refer to FR13A-X-Y-Z

\* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.35 kg(WITHOUT VALVE)
	0.5 kg(INCLUDE VALVE)

\* If you need the special specification.  
Please contact us.

Typical Performance

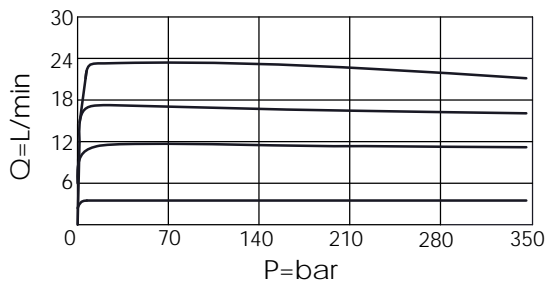

### X SELECTION FOR A PORT CONTROL

<b>13A2</b>	CAVITY ONLY(WITHOUT VALVE)	
<b>FR0A</b>	FR13A20AL (23LPM,350bar)	

### Y SELECTION FOR B PORT CONTROL

<b>N</b>	WITHOUT PORT	

### Z BODY MATERIAL

<b>A</b>	HIGH-STRENGTH ALUMINUM	