

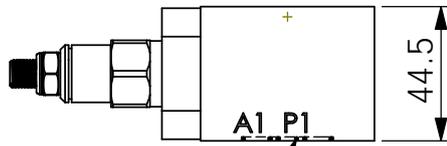
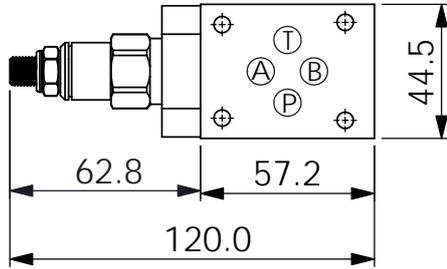


Ordering Code: **MH03FAO-X-Y-Z01**
 Stack Height : 44.5mm

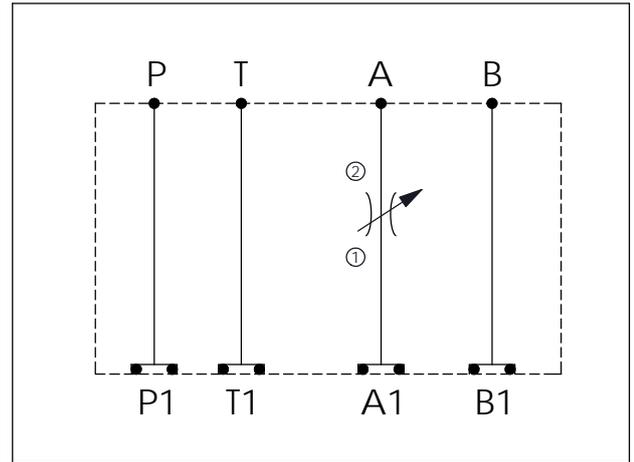

O-RING CODE NO.
4KAA012AA001

UNIT:mm



TECHNICAL DATA

Aluminum Body Pressure Rating: 250 bar

Ductile Iron Body Pressure Rating: 350 bar


Rated flow: 40 l/min

Cartridge Valve:
Refer to NV13A-X-Y-Z
* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.35 kg(WITHOUT VALVE)
	0.5 kg(INCLUDE VALVE)

* If you need the special specification. Please contact us.

FULLY OPEN RESTRICTOR-FLOW IN BOTH DIRECTIONS

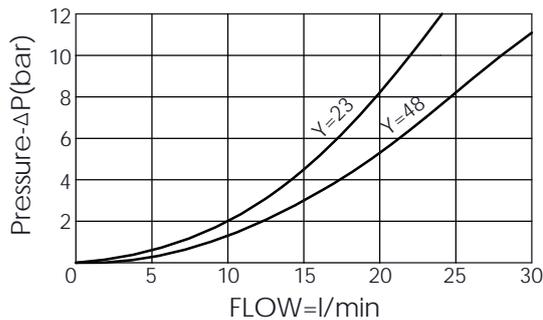

X SELECTION FOR A PORT CONTROL

13A2	CAVITY ONLY(WITHOUT VALVE)	
NV48	NV13A2048L (350bar)	

Y SELECTION FOR B PORT CONTROL

N	WITHOUT PORT	

Z BODY MATERIAL

A	HIGH-STRENGTH ALUMINUM	