

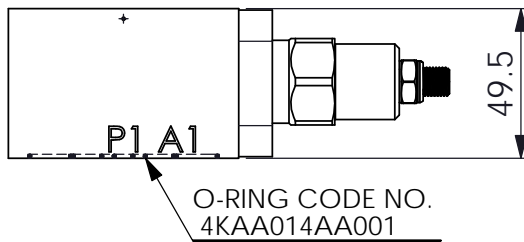
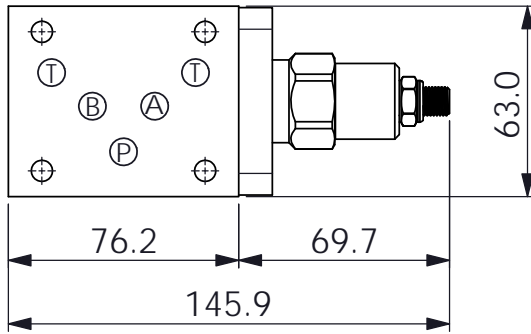


Ordering Code: **MH05FAO-X-Y-Z01**

Stack Height : 49.5mm

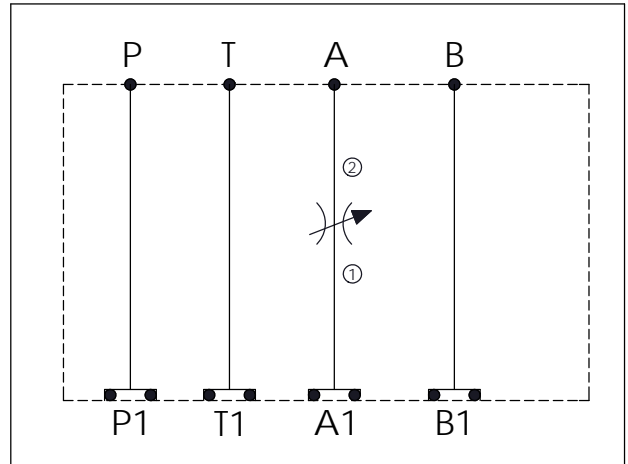

UNIT:mm



TECHNICAL DATA

Aluminum Body Pressure Rating: 250 bar

Ductile Iron Body Pressure Rating: 350 bar


Rated flow: 80 l/min

Cartridge Valve:
Refer to NV5A-X-Y-Z
* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.6 kg(WITHOUT VALVE) 0.87 kg(INCLUDE VALVE)
Ductile Iron	1.76 kg(WITHOUT VALVE) 2.03 kg(INCLUDE VALVE)

* If you need the special specification. Please contact us.

FULLY OPEN RESTRICTOR-FLOW IN BOTH DIRECTIONS

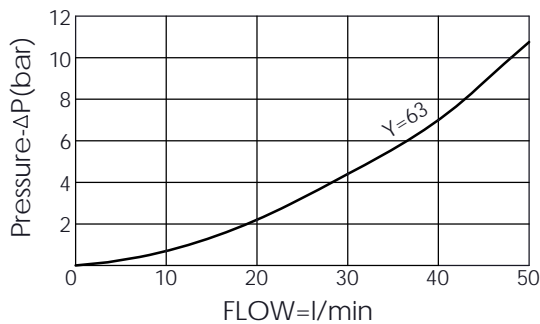

X SELECTION FOR A PORT CONTROL

5A2 CAVITY ONLY(WITHOUT VALVE)

NV63 NV5A2063L (350bar)

Y SELECTION FOR B PORT CONTROL

N WITHOUT PORT

Z BODY MATERIAL

A HIGH-STRENGTH ALUMINUM

S DUCTILE IRON