

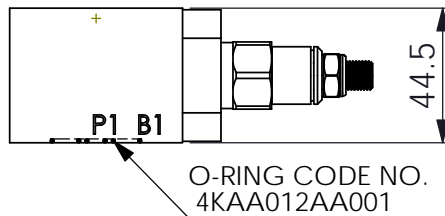
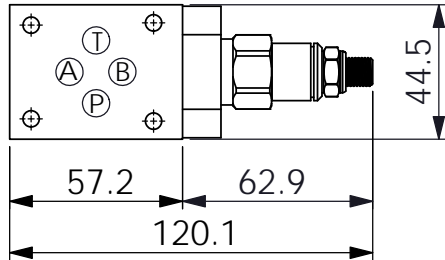


Ordering Code: **MH03FBO-X-Y-Z01**  
 Stack Height : 44.5mm

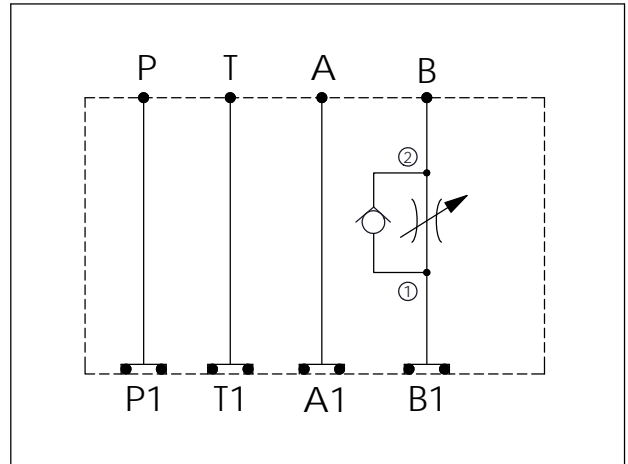

UNIT:mm



### TECHNICAL DATA



Aluminum Body Pressure Rating: 250 bar  
 Ductile Iron Body Pressure Rating: 350 bar

Rated flow: 40 l/min

Cartridge Valve:  
 Refer to NC13A-X-Y-Z  
 \* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.35 kg(WITHOUT VALVE) 0.5 kg(INCLUDE VALVE)
Ductile Iron	1.0 kg(WITHOUT VALVE) 1.15 kg(INCLUDE VALVE)

\* If you need the special specification. Please contact us.

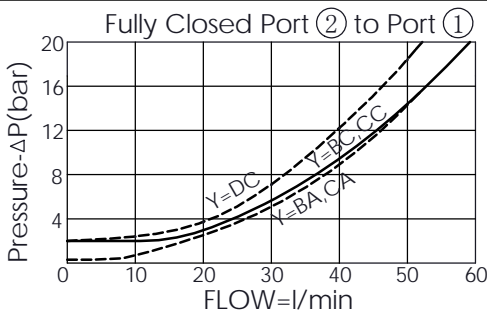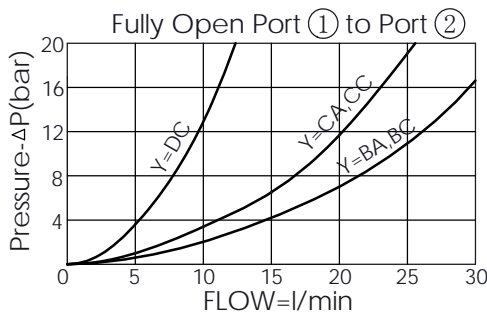

### X SELECTION FOR A PORT CONTROL

N WITHOUT PORT

### Z BODY MATERIAL

A HIGH-STRENGTH ALUMINUM

S DUCTILE IRON

### Y SELECTION FOR B PORT CONTROL

<b>13A2</b>	CAVITY ONLY(WITHOUT VALVE)
<b>NCBA</b>	NC13A21BAL(20LPM,0.3bar)
<b>NCBC</b>	NC13A21BCL(20LPM,2.0bar)