

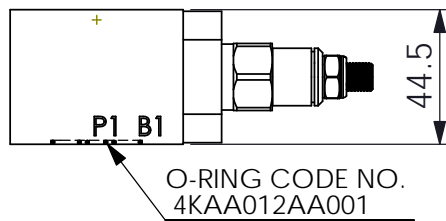
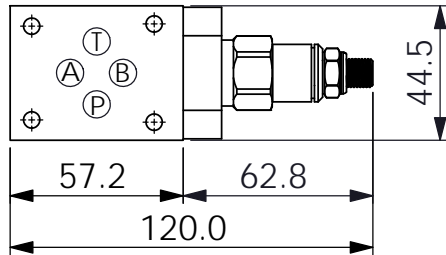


Ordering Code: MH03FBO-X-Y-Z01
Stack Height : 44.5mm

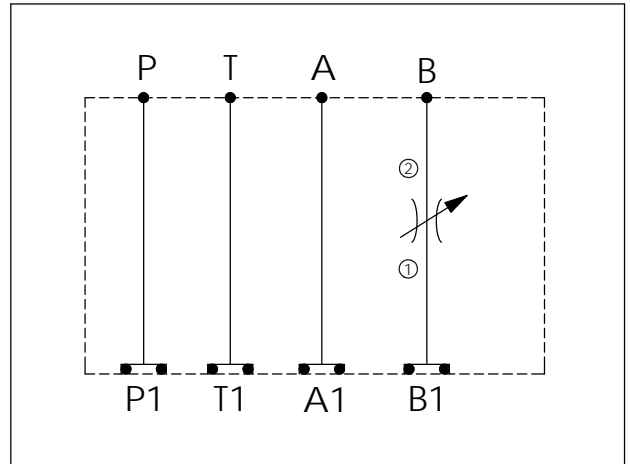

UNIT:mm



TECHNICAL DATA

Aluminum Body Pressure Rating: 250 bar
 Ductile Iron Body Pressure Rating: 350 bar


Rated flow: 40 l/min

Cartridge Valve:
 Refer to NV13A-X-Y-Z
 * Refer to Winner Cartridge Valves Catalog.

Aluminum	0.35 kg(WITHOUT VALVE) 0.5 kg(INCLUDE VALVE)
Ductile Iron	1.0 kg(WITHOUT VALVE) 1.15 kg(INCLUDE VALVE)

* If you need the special specification. Please contact us.

FULLY OPEN RESTRICTOR-FLOW IN BOTH DIRECTIONS

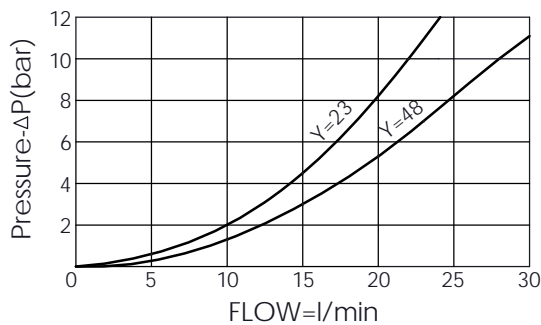

X SELECTION FOR A PORT CONTROL

N WITHOUT PORT

Y SELECTION FOR B PORT CONTROL

13A2	CAVITY ONLY(WITHOUT VALVE)
NV48	NV13A2048L (350bar)

Z BODY MATERIAL

A	HIGH-STRENGTH ALUMINUM
S	DUCTILE IRON