
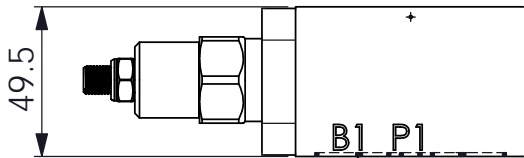


## ISO 05 SANDWICH MANIFOLD



Ordering Code: **MH05FBO-X-Y-Z01**

Stack Height : 49.5mm

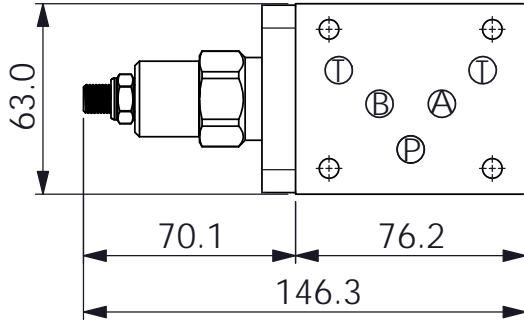

O-RING CODE NO.  
4KAA014AA001

UNIT:mm

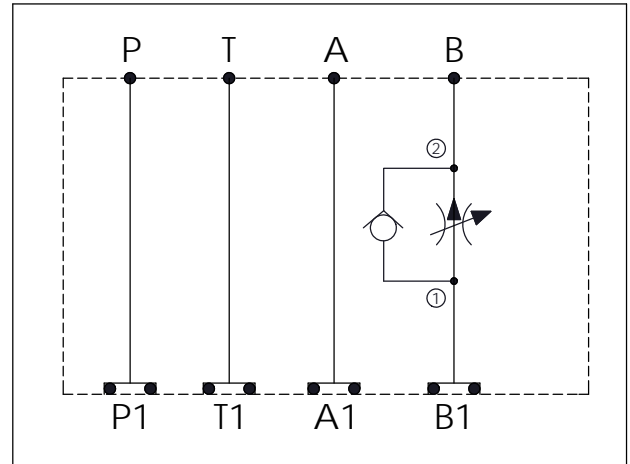

### TECHNICAL DATA

Aluminum Body Pressure Rating: 250 bar

Ductile Iron

Body Pressure Rating: 350 bar


Rated flow: 45 l/min  
(Pressure Compensated)

Cartridge Valve:  
Refer to FR5A-X-Y-Z

\* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.6 kg(WITHOUT VALVE)
	0.87 kg(INCLUDE VALVE)
Ductile Iron	1.76 kg(WITHOUT VALVE)
	2.03 kg(INCLUDE VALVE)

\* If you need the special specification.  
Please contact us.

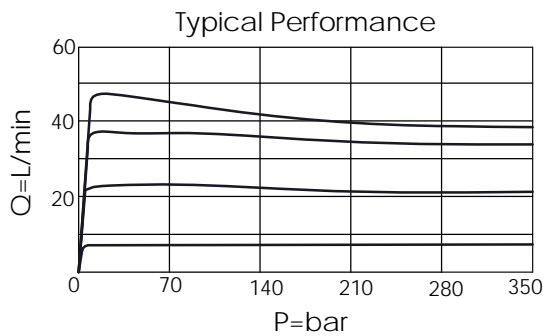

**X** SELECTION FOR A PORT CONTROL

**N** WITHOUT PORT

**Y** SELECTION FOR B PORT CONTROL

**5A2** CAVITY ONLY(WITHOUT VALVE)

**FR0A** FR5A20AL (45 LPM , 350bar)

**Z** BODY MATERIAL

**A** HIGH-STRENGTH ALUMINUM

**S** DUCTILE IRON