

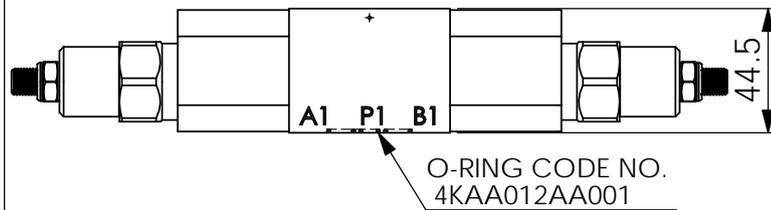
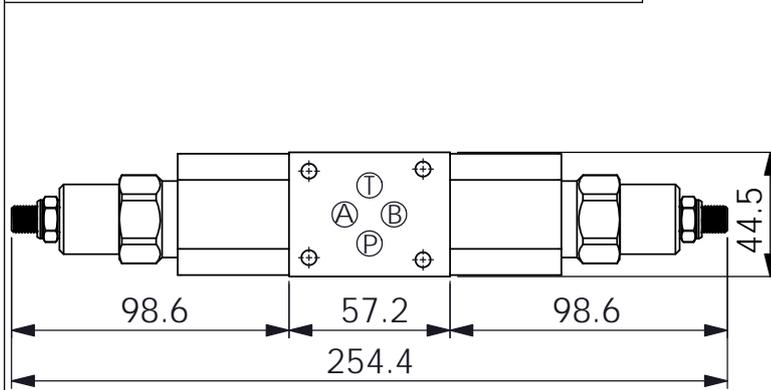


Ordering Code:	MH03FDH-X-Y-Z 01
Stack Height :	44.5mm

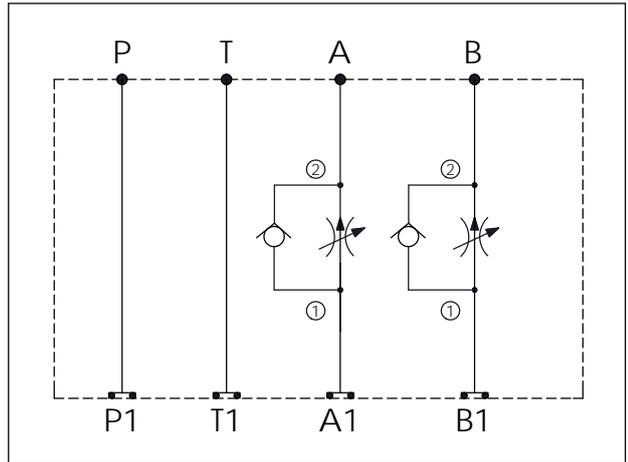

UNIT:mm



TECHNICAL DATA


Aluminum Body Pressure Rating: 250 bar
Ductile Iron
Body Pressure Rating: 350 bar

Rated flow: 40 l/min
(Pressure Compensated)

Cartridge Valve:
Refer to FR5A-X-Y-Z
* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.53 kg(WITHOUT VALVES) 1.07 kg(INCLUDE VALVES)
Ductile Iron	1.53 kg(WITHOUT VALVES) 2.07 kg(INCLUDE VALVES)

* If you need the special specification.
Please contact us.

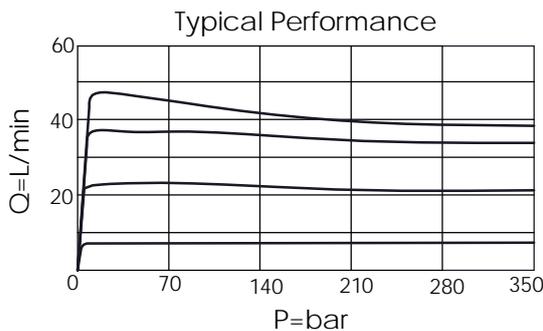

X SELECTION FOR A PORT CONTROL

5A2 CAVITY ONLY(WITHOUT VALVE)

FR0A FR5A20AL(0.4-45LPM)

Y SELECTION FOR B PORT CONTROL

5A2 CAVITY ONLY(WITHOUT VALVE)

FR0A FR5A20AL(0.4-45LPM)

Z BODY MATERIAL

A HIGH-STRENGTH ALUMINUM

S DUCTILE IRON