


Ordering Code: **MH03FDI-X-Y-Z 01**

Stack Height : 44.5mm

UNIT:mm

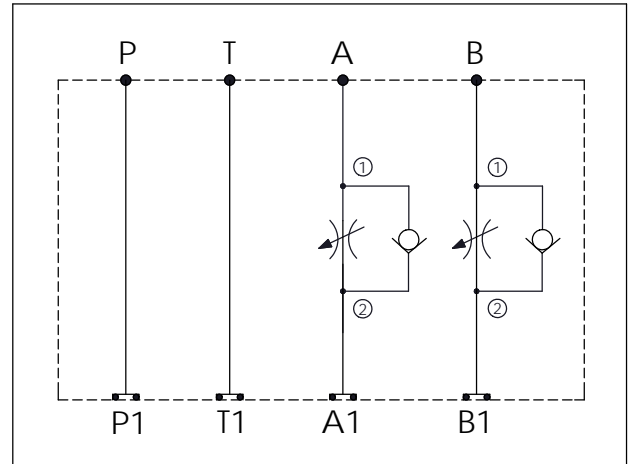

### TECHNICAL DATA


Aluminum Body Pressure Rating: 250 bar  
 Ductile Iron Body Pressure Rating: 350 bar

Rated flow: 40 l/min

Cartridge Valve:  
 Refer to NC13A-X-Y-Z  
 \* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.4 kg(WITHOUT VALVES) 0.7 kg(INCLUDE VALVES)
Ductile Iron	1.15 kg(WITHOUT VALVES) 1.45 kg(INCLUDE VALVES)

\* If you need the special specification. Please contact us.

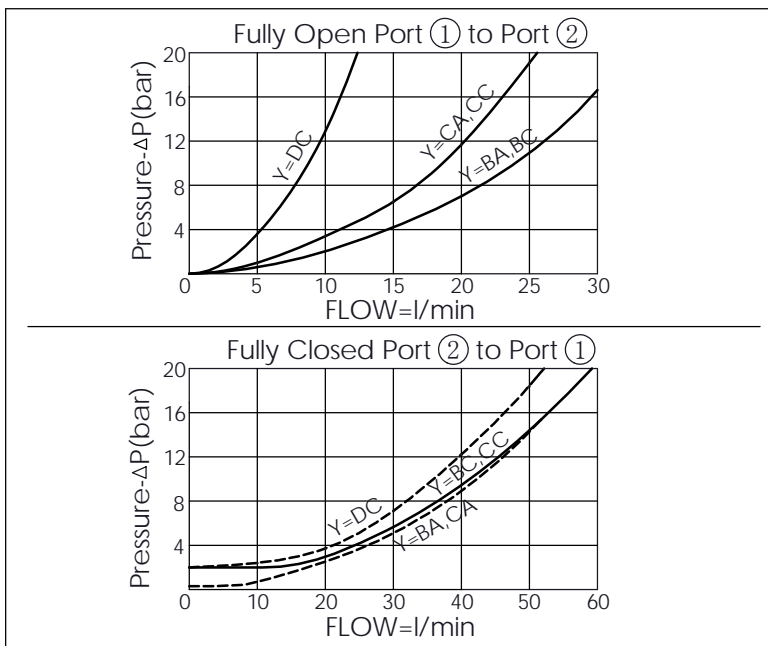

Y	SELECTION FOR B PORT CONTROL
<b>13A2</b>	CAVITY ONLY(WITHOUT VALVE)
<b>NCBA</b>	NC13A21BAL(20LPM,0.3bar)
<b>NCBC</b>	NC13A21BCL(20LPM,2.0bar)

X	SELECTION FOR A PORT CONTROL
<b>13A2</b>	CAVITY ONLY(WITHOUT VALVE)
<b>NCBA</b>	NC13A21BAL (20LPM,0.3bar)
<b>NCBC</b>	NC13A21BCL (20LPM,2.0bar)

Z	BODY MATERIAL
<b>A</b>	HIGH-STRENGTH ALUMINUM
<b>S</b>	DUCTILE IRON