

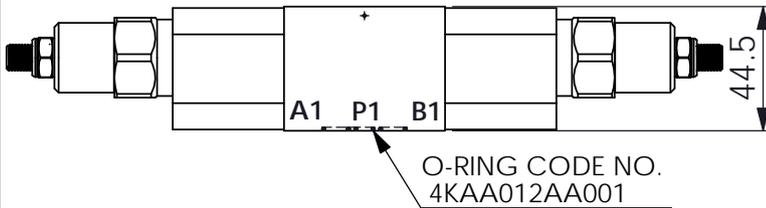
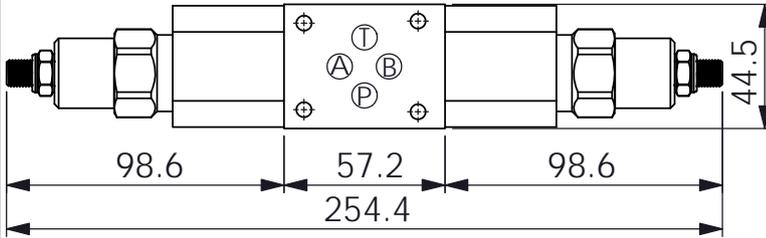


Ordering Code:	<b>MH03FDJ-X-Y-Z01</b>
Stack Height :	44.5mm

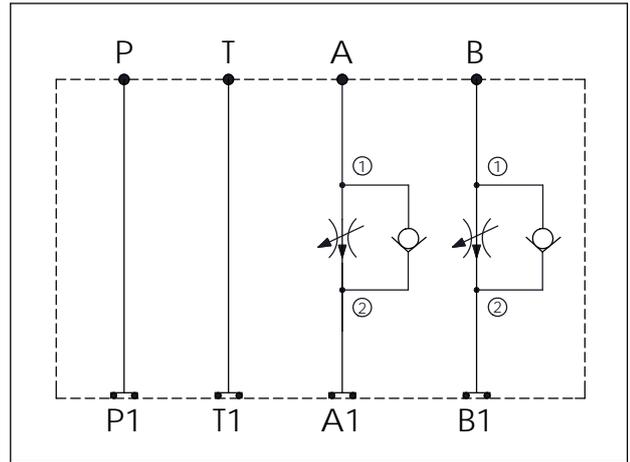

UNIT:mm



### TECHNICAL DATA


Aluminum Body Pressure Rating: 250 bar  
 Ductile Iron Body Pressure Rating: 350 bar

Rated flow: 40 l/min  
 (Pressure Compensated)

Cartridge Valve:  
 Refer to FR5A-X-Y-Z  
 \* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.53 kg(WITHOUT VALVES) 1.07 kg(INCLUDE VALVES)
Ductile Iron	1.53 kg(WITHOUT VALVES) 2.07 kg(INCLUDE VALVES)

\* If you need the special specification.  
 Please contact us.

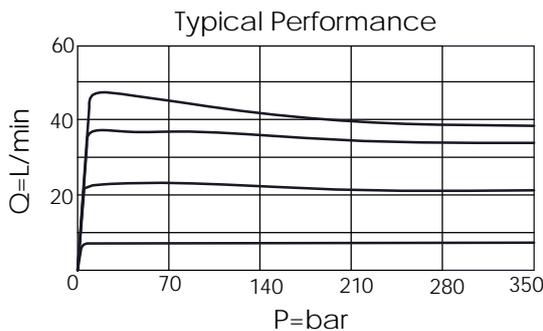

### X SELECTION FOR A PORT CONTROL

**5A2** CAVITY ONLY(WITHOUT VALVE)

**FR0A** FR5A20AL(0.4-45LPM)

### Y SELECTION FOR B PORT CONTROL

**5A2** CAVITY ONLY(WITHOUT VALVE)

**FR0A** FR5A20AL(0.4-45LPM)

### Z BODY MATERIAL

**A** HIGH-STRENGTH ALUMINUM

**S** DUCTILE IRON