


Ordering Code: **MH03FDO-X-Y-Z 01**

Stack Height : 44.5mm

Dimensions: 67.6, 57.2, 67.6, 192.3, 44.5

O-RING CODE NO. 4KAA012AA001

UNIT:mm

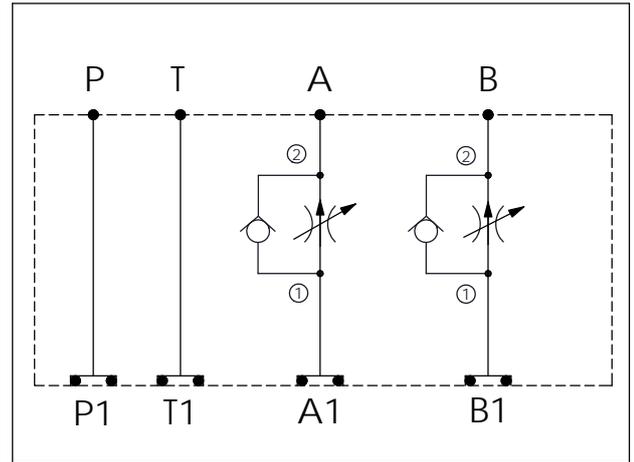

### TECHNICAL DATA


Aluminum Body Pressure Rating: 250 bar  
 Ductile Iron Body Pressure Rating: 350 bar

Rated flow: 23 l/min (Pressure Compensated)

Cartridge Valve: Refer to FR13A-X-Y-Z  
 \* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.4 kg(WITHOUT VALVES) 0.7 kg(INCLUDE VALVES)
Ductile Iron	1.15 kg(WITHOUT VALVES) 1.45 kg(INCLUDE VALVES)

\* If you need the special specification. Please contact us.

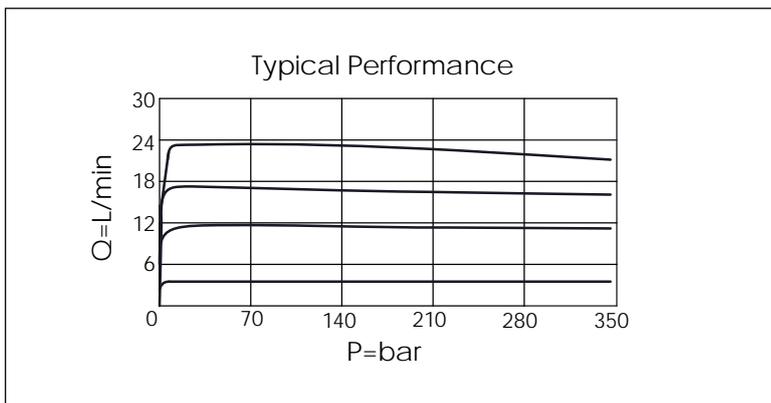

X	SELECTION FOR A PORT CONTROL	
13A2	CAVITY ONLY(WITHOUT VALVE)	
FR0A	FR13A20AL(0.4-23LPM,350bar)	
FR0C	FR13A20CL(0.4-4LPM,350bar)	

Y	SELECTION FOR B PORT CONTROL	
13A2	CAVITY ONLY(WITHOUT VALVE)	
FR0A	FR13A20AL (0.4-23LPM,350bar)	
FR0C	FR13A20CL(0.4-4LPM,350bar)	

Z	BODY MATERIAL	
A	HIGH-STRENGTH ALUMINUM	
S	DUCTILE IRON	