


Ordering Code:	<b>MH05FDO-X-Y-Z01</b>
Stack Height :	49.5mm


  

Technical drawing showing front and side views of the ISO 05 Sandwich Manifold. Dimensions are provided in millimeters (mm). The front view shows a total length of 229.2 mm, divided into three sections of 76.5 mm, 76.2 mm, and 76.5 mm. The height is 63.0 mm. The side view shows a height of 49.5 mm. Port labels include P, T, A, B, P1, T1, A1, B1, and P. An O-ring code is specified as 4KAA014AA001.

UNIT:mm

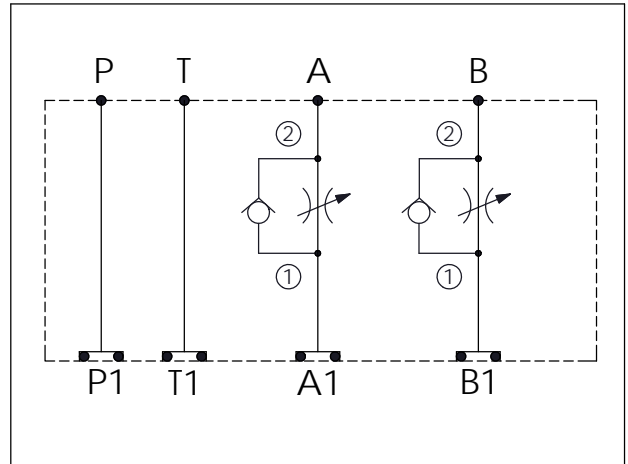

<b>TECHNICAL DATA</b>	
Aluminum Body Pressure Rating:	250 bar
Ductile Iron Body Pressure Rating:	350 bar
Rated flow:	80 l/min
Cartridge Valve: Refer to NC5A-X-Y-Z * Refer to Winner Cartridge Valves Catalog.	
Aluminum	0.73 kg(WITHOUT VALVES) 1.27 kg(INCLUDE VALVES)
Ductile Iron	2.13 kg(WITHOUT VALVES) 2.67 kg(INCLUDE VALVES)
* If you need the special specification. Please contact us.	

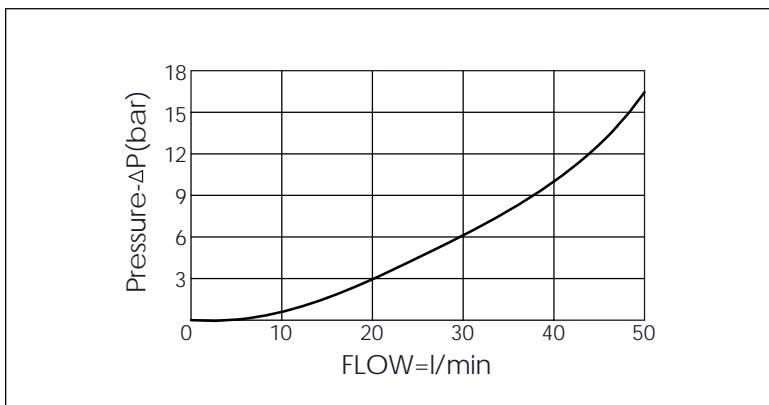

<b>X</b>	<b>SELECTION FOR A PORT CONTROL</b>
<b>5A2</b>	CAVITY ONLY(WITHOUT VALVE)
<b>NCBC</b>	NC5A21BCL (2.0bar)

<b>Y</b>	<b>SELECTION FOR B PORT CONTROL</b>
<b>5A2</b>	CAVITY ONLY(WITHOUT VALVE)
<b>NCBC</b>	NC5A21BCL (2.0bar)

<b>Z</b>	<b>BODY MATERIAL</b>
<b>A</b>	HIGH-STRENGTH ALUMINUM
<b>S</b>	DUCTILE IRON