

Ordering Code: **MH03FDT-X-Y-Z01**


Stack Height : 44.5mm

Dimensions: 70.7, 57.2, 70.7, 198.5, 44.5


Ports: P, T, A, B, P1, T1, A1, B1

O-RING CODE NO. 4KAA012AA001

UNIT:mm

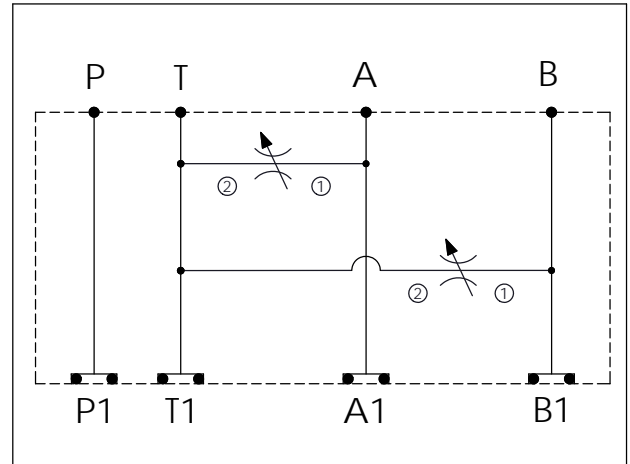

TECHNICAL DATA	
Aluminum Body Pressure Rating:	250 bar
Ductile Iron Body Pressure Rating:	350 bar
Rated flow:	40 l/min
Cartridge Valve:	Refer to NV13A-X-Y-Z
* Refer to Winner Cartridge Valves Catalog.	
Aluminum	0.45 kg(WITHOUT VALVES) 0.75 kg(INCLUDE VALVES)
Ductile Iron	1.2 kg(WITHOUT VALVES) 1.5 kg(INCLUDE VALVES)
* If you need the special specification. Please contact us.	

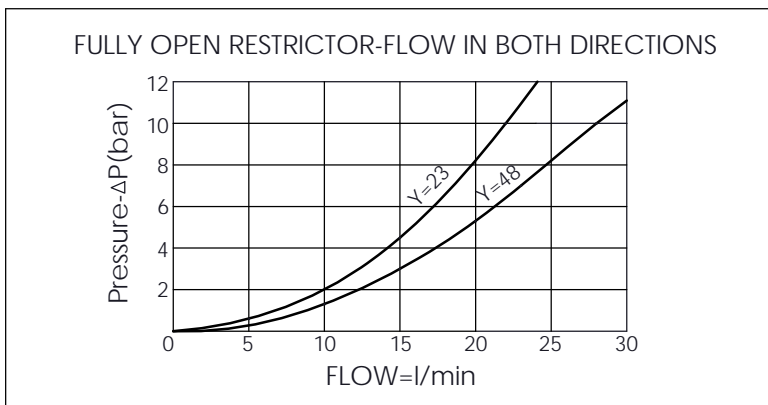

X	SELECTION FOR A PORT CONTROL	
13A2	CAVITY ONLY(WITHOUT VALVE)	
NV48	NV13A2048L (350bar)	

Y	SELECTION FOR B PORT CONTROL	
13A2	CAVITY ONLY(WITHOUT VALVE)	
NV48	NV13A2048L (350bar)	

Z	BODY MATERIAL	
A	HIGH-STRENGTH ALUMINUM	
S	DUCTILE IRON	