

## ISO 05 SANDWICH MANIFOLD

Ordering Code: **MH05FDT-X-Y-Z02**


Stack Height : 40.0mm

Dimensions:  
 Total length: 232.2 mm  
 Port spacing: 78.0 mm (left), 76.2 mm (middle), 78.0 mm (right)  
 Body diameter: 63.0 mm  
 Stack height: 40.0 mm

Ports: P, T, A, B (top view); P1, T1, A1, B1 (bottom view)

O-RING CODE NO. 4KAA014AA001

UNIT:mm

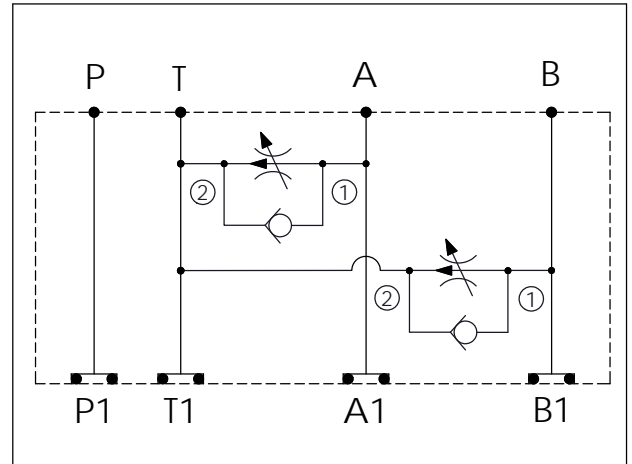


### TECHNICAL DATA

Aluminum Body Pressure Rating: 250 bar  
 Ductile Iron Body Pressure Rating: 350 bar  
 Rated flow: 45 l/min (Pressure Compensated)  
 Cartridge Valve: Refer to FR5A-X-Y-Z  
 \* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.6 kg(WITHOUT VALVES) 1.2 kg(INCLUDE VALVES)
----------	--

\* If you need the special specification. Please contact us.

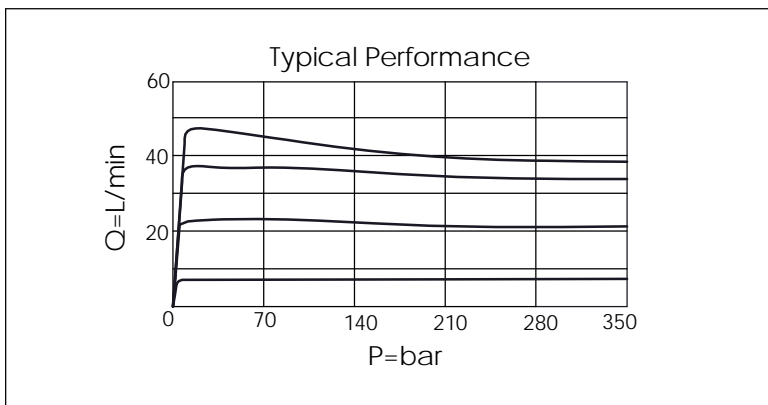

X	SELECTION FOR A PORT CONTROL	
5A2	CAVITY ONLY(WITHOUT VALVE)	
FR0A	FR5A20AL(45 LPM , 350bar)	

Y	SELECTION FOR B PORT CONTROL	
5A2	CAVITY ONLY(WITHOUT VALVE)	
FR0A	FR5A20AL (45 LPM , 350bar)	

Z	BODY MATERIAL	
A	HIGH-STRENGTH ALUMINUM	