

## ISO 05 SANDWICH MANIFOLD

Ordering Code: **MH05FDT-X-Y-Z02**


Stack Height : 40.0mm

Dimensions: 77.6, 76.2, 77.6, 231.5, 63.0, 40.0


Ports: P, T, A, B, P1, T1, A1, B1

O-RING CODE NO. 4KAA014AA001

UNIT:mm

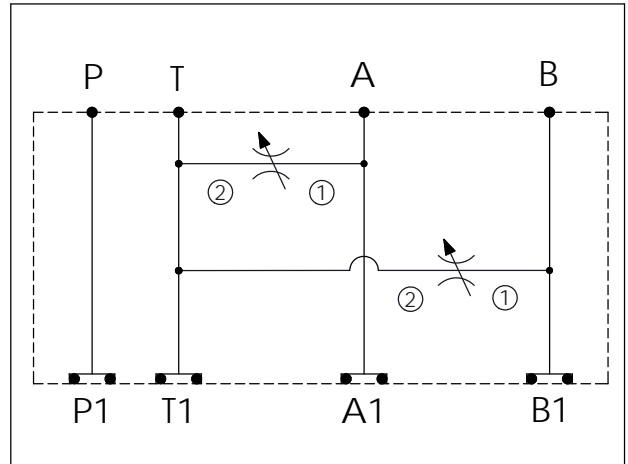

TECHNICAL DATA	
Aluminum Body Pressure Rating:	250 bar
Ductile Iron Body Pressure Rating:	350 bar
Rated flow:	80 l/min
Cartridge Valve: Refer to NV5A-X-Y-Z	
* Refer to Winner Cartridge Valves Catalog.	
Aluminum	0.6 kg(WITHOUT VALVES) 1.2 kg(INCLUDE VALVES)
* If you need the special specification. Please contact us.	

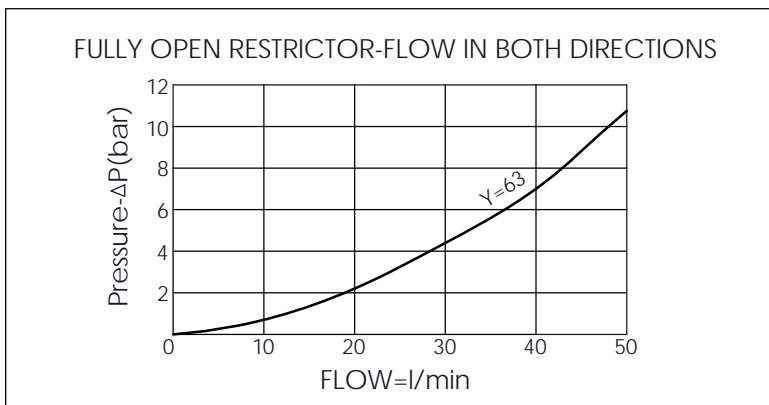

X	SELECTION FOR A PORT CONTROL
5A2	CAVITY ONLY(WITHOUT VALVE)
NV63	NV5A2063L (350bar)

Y	SELECTION FOR B PORT CONTROL
5A2	CAVITY ONLY(WITHOUT VALVE)
NV63	NV5A2063L (350bar)

Z	BODY MATERIAL
A	HIGH-STRENGTH ALUMINUM