

Ordering Code: **MH05FDT-X-Y-Z02**


Stack Height : 40.0mm

Dimensions: 77.9, 76.2, 77.9, 232.0, 63.0, 40.0

Ports: P, T, A, B, P1, T1, A1, B1

O-RING CODE NO. 4KAA014AA001

UNIT:mm

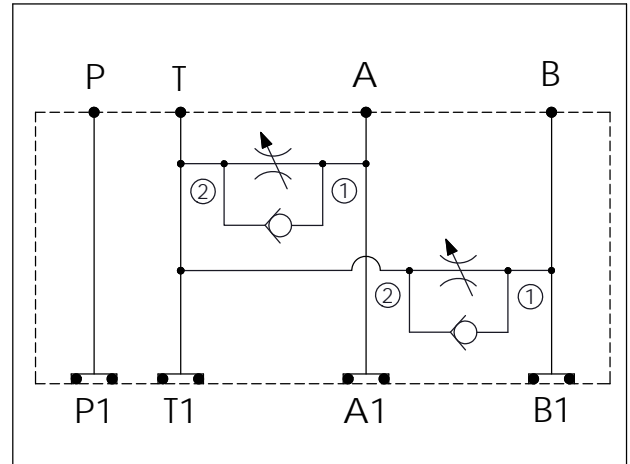

TECHNICAL DATA


Aluminum Body Pressure Rating: 250 bar
 Ductile Iron Body Pressure Rating: 350 bar

Rated flow: 80 l/min

Cartridge Valve:
 Refer to NC5A-X-Y-Z
 * Refer to Winner Cartridge Valves Catalog.

Aluminum	0.6 kg(WITHOUT VALVES) 1.2 kg(INCLUDE VALVES)
----------	--

* If you need the special specification. Please contact us.

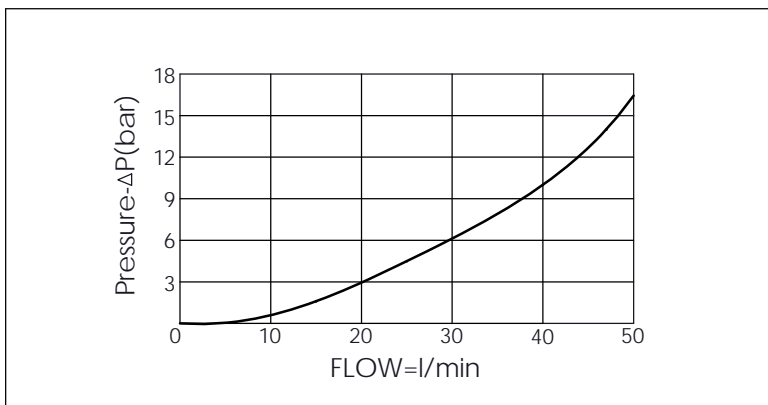

X	SELECTION FOR A PORT CONTROL
5A2	CAVITY ONLY(WITHOUT VALVE)
NCBC	NC5A21BCL (2.0bar)

Y	SELECTION FOR B PORT CONTROL
5A2	CAVITY ONLY(WITHOUT VALVE)
NCBC	NC5A21BCL (2.0bar)

Z	BODY MATERIAL
A	HIGH-STRENGTH ALUMINUM