



ISO 03 SANDWICH MANIFOLD



Stack Height: 44.5mm





P T A B

3
2
P1 T1 A1 B1

TECHNICAL DATA

Aluminum Body Pressure Rating: 250 bar

Ductile Iron

Body Pressure Rating: 350 bar

Rated flow: 40 1/min

Cartridge Valve:

Refer to FR10W-X-Y-Z


* Refer to Winner Cartridge Valves Catalog.


Aluminum	0.31 kg(WITHOUT VALVE) 0.45 kg(INCLUDE VALVE)

* If you need the special specification. Please contact us.

UNIT:mm





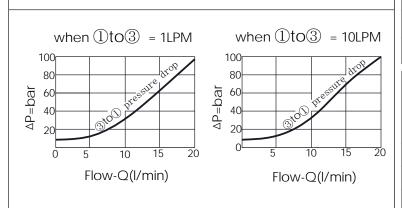

X	SELECTION FOR P PORT	CONTROL
10W3	CAVITY ONLY(WITHOUT VALVE)	
FR1L	FR10W31NL (13LPM,240bar)	
FR3L	FR10W33NL (38LPM,240bar)	

Υ	SELECTION FOR G F	PORT
N	WITHOUT PORT	

Z	BODY MATERIAL	
Α	HIGH-STRENGTH ALUMINUM	

Rev.171006 M.FPB.301