


Ordering Code: **MH03FPW-X-Y-Z01**

Stack Height : 44.5mm

O-RING CODE NO.
4KAA012AA001

UNIT:mm

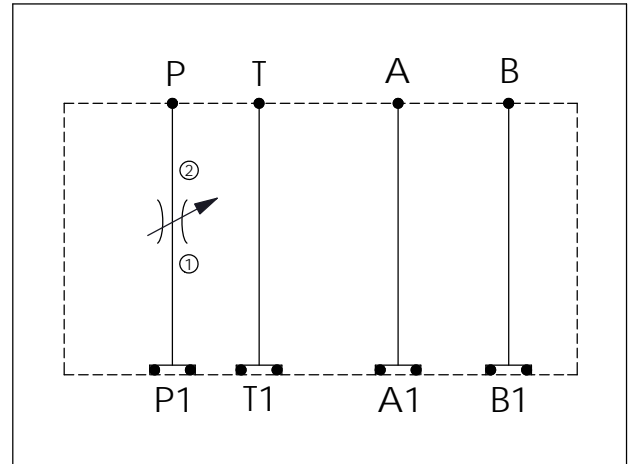

TECHNICAL DATA

Aluminum Body Pressure Rating: 250 bar
Ductile Iron Body Pressure Rating: 350 bar


Rated flow: 40 l/min

Cartridge Valve:
Refer to NV13A-X-Y-Z

* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.27 kg(WITHOUT VALVE)
	0.45 kg(INCLUDE VALVE)
Ductile Iron	0.77 kg(WITHOUT VALVE)
	0.95 kg(INCLUDE VALVE)

* If you need the special specification.
Please contact us.

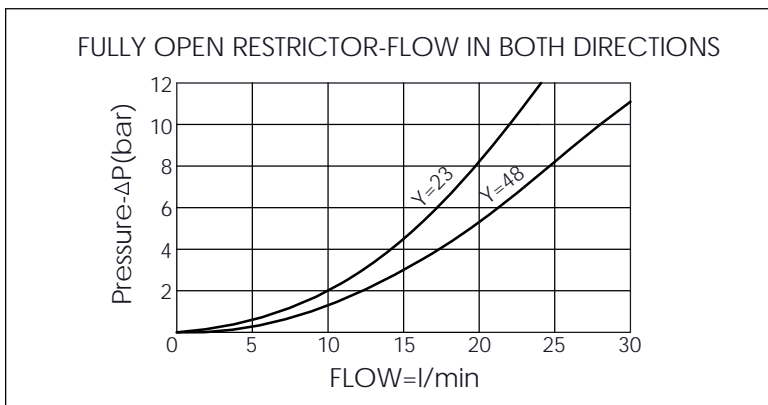

X	SELECTION FOR P PORT CONTROL	
13A2	CAVITY ONLY(WITHOUT VALVE)	
NV48	NV13A2048L (350bar)	

Y	SELECTION FOR G PORT	
N	WITHOUT PORT	

Z	BODY MATERIAL	
A	HIGH-STRENGTH ALUMINUM	
S	DUCTILE IRON	