



Ordering Code:	MH03FTH-X-Y-Z01
Stack Height :	44.5mm

O-RING CODE NO.
4KAA012AA001

UNIT:mm ⊕

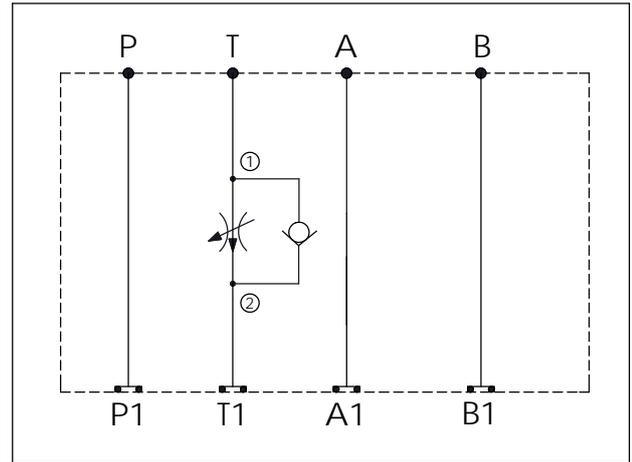

TECHNICAL DATA	
Aluminum Body Pressure Rating:	250 bar
Ductile Iron Body Pressure Rating:	350 bar
Rated flow:	40 l/min (Pressure Compensated)
Cartridge Valve:	Refer to FR5A-X-Y-Z
* Refer to Winner Cartridge Valve Catalog.	
Aluminum	0.4 kg(WITHOUT VALVE) 0.67 kg(INCLUDE VALVE)
Ductile Iron	1.15 kg(WITHOUT VALVE) 1.42 kg(INCLUDE VALVE)
* If you need the special specification. Please contact us.	

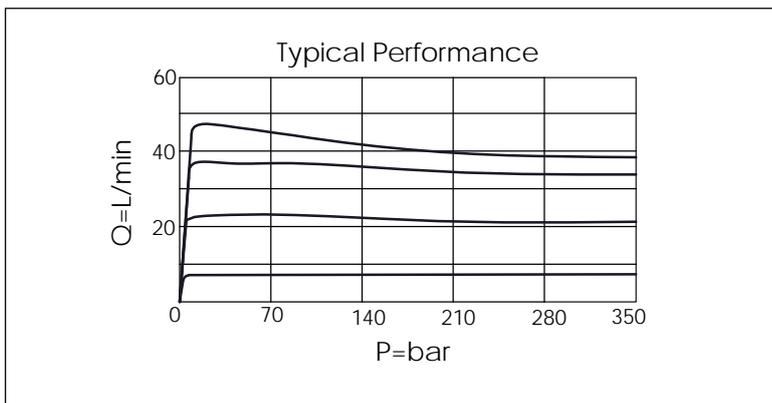

X	SELECTION FOR G PORT	
G02	G 1/4"(Metric)	

Y	SELECTION FOR T PORT CONTROL	
5A2	CAVITY ONLY(WITHOUT VALVE)	
FR0A	FR5A20AL(0.4-45LPM)	

Z	BODY MATERIAL	
A	HIGH-STRENGTH ALUMINUM	
S	DUCTILE IRON	