

ISO 03 SANDWICH MANIFOLD

Ordering Code: **MH03GBW-X-Y-Z01**

Stack Height : 44.5mm


SD11A CB11A

89.8 57.2 63.5 210.6 44.5

A1 P1 B1

O-RING CODE NO. 4KAA012AA001

UNIT:mm

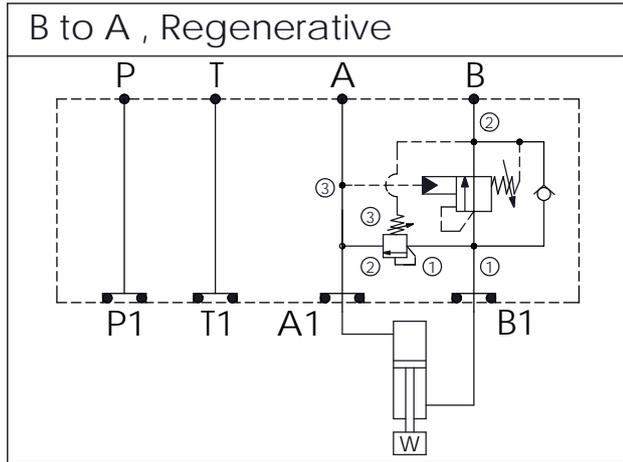

TECHNICAL DATA

Aluminum Body Pressure Rating: 250 bar
 Ductile Iron Body Pressure Rating: 350 bar


Rated flow: 40 l/min

Cartridge Valve:
 Refer to SD11A-X-Y-Z
 CB11A-X-Y-Z

* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.5 kg(WITHOUT VALVES) 0.95 kg(INCLUDE VALVES)
Ductile Iron	1.35 kg(WITHOUT VALVES) 1.8 kg(INCLUDE VALVES)

* If you need the special specification. Please contact us.

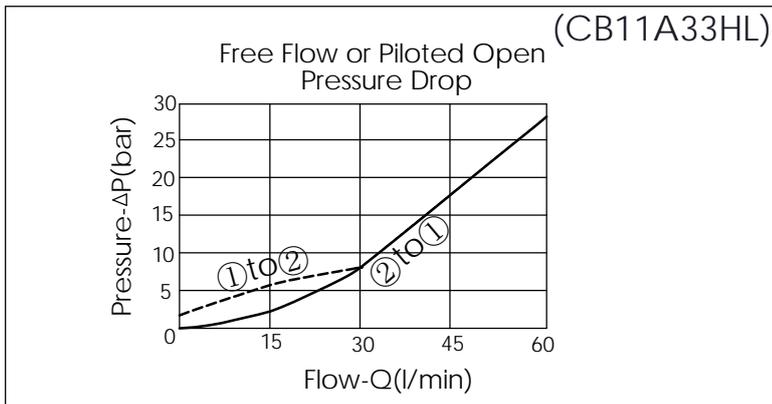

X	SELECTION FOR PILOT-TO-CLOSE VALVE	
11A3	CAVITY ONLY(WITHOUT VALVE)	
SD0A	SD11A30AL (60LPM,35-210bar)	
SD0B	SD11A30BL (60LPM,20-105bar)	

Y	SELECTION FOR COUNTERBALANCE VALVE	
11A3	CAVITY ONLY(WITHOUT VALVE)	
CB3H	CB11A33HL (60LPM , 70-280bar)	

Z	BODY MATERIAL	
A	HIGH-STRENGTH ALUMINUM	
S	DUCTILE IRON	