


ISO 03 SANDWICH MANIFOLD

Ordering Code: **MH03PAC-X-Y-Z01**

Stack Height : 44.5mm

O-RING CODE NO.
4KAA012AA001

UNIT:mm

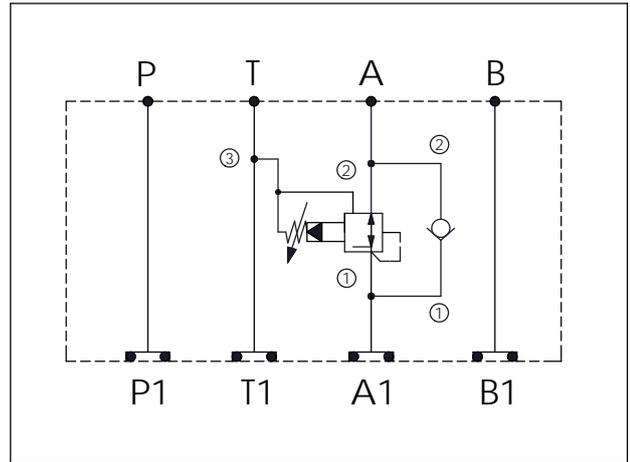

TECHNICAL DATA

Aluminum Body Pressure Rating: 250 bar

Ductile Iron
Body Pressure Rating: 350 bar

Rated flow: 40 l/min


Cartridge Valve:
Refer to PP11A-X-Y-Z
CV13A-X-Y-Z

* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.46 kg(WITHOUT VALVES) 0.71 kg(INCLUDE VALVES)
----------	--

Ductile Iron	1.33 kg(WITHOUT VALVES) 1.58 kg(INCLUDE VALVES)
--------------	--

* If you need the special specification.
Please contact us.

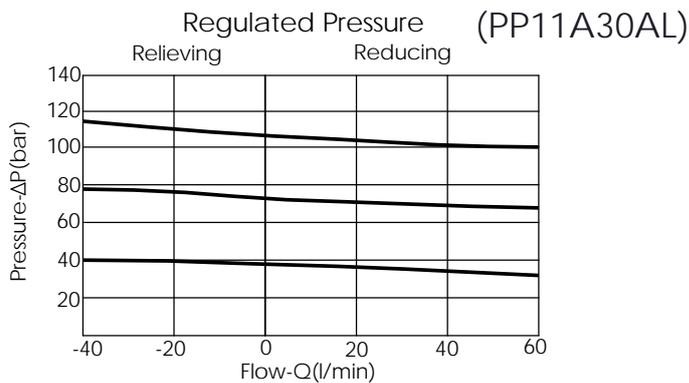

X SELECTION FOR A PORT CONTROL

11A3	CAVITY ONLY(WITHOUT VALVE)
-------------	----------------------------

PP0A	PP11A30AL (40LPM , 7-210bar)
-------------	------------------------------

Y SELECTION FOR CHECK VALVE

13A2	CAVITY ONLY(WITHOUT VALVE)
CP00	CP13A2H00N (PLUG ONLY)
CV20	CV13A2020N (80LPM , 2.0bar)

Z BODY MATERIAL

A	HIGH-STRENGTH ALUMINUM
S	DUCTILE IRON