

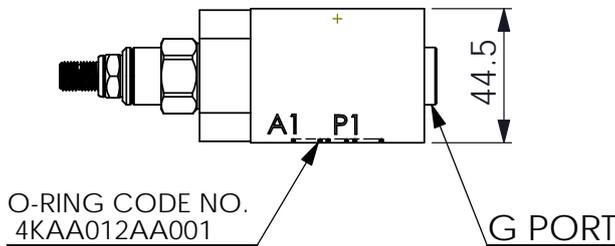
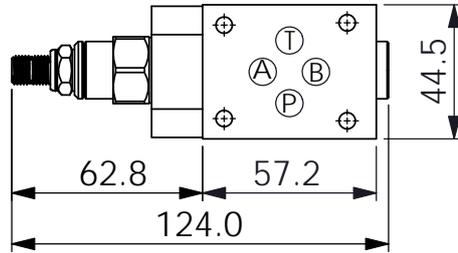


Ordering Code:	MH03PPW-X-Y-Z 01
Stack Height :	44.5mm

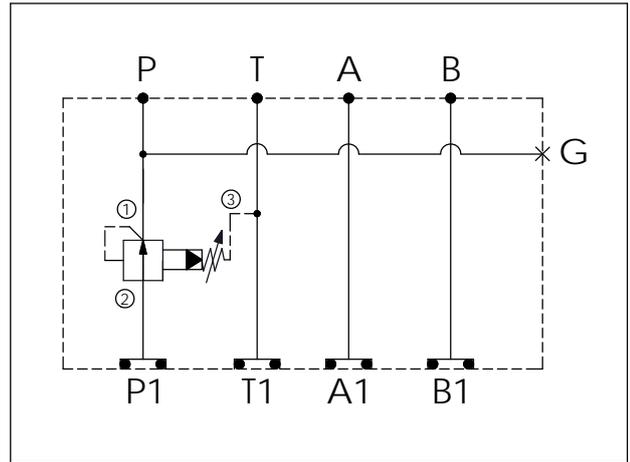

UNIT:mm



TECHNICAL DATA


Aluminum Body Pressure Rating: 250 bar
 Ductile Iron Body Pressure Rating: 350 bar

Rated flow: 40 l/min

Cartridge Valve:
 Refer to PB11A-X-Y-Z
 * Refer to Winner Cartridge Valve Catalog.

Aluminum	0.32 kg(WITHOUT VALVE)
	0.48 kg(INCLUDE VALVE)
Ductile Iron	0.9 kg(WITHOUT VALVE)
	1.06 kg(INCLUDE VALVE)

* If you need the special specification. Please contact us.

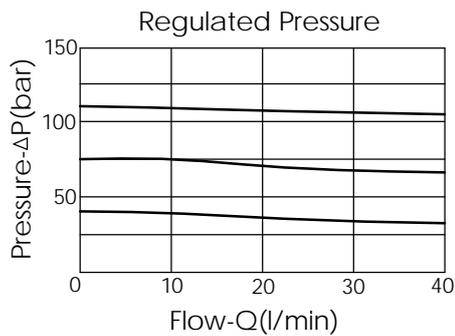

X SELECTION FOR P PORT CONTROL

11A3	CAVITY ONLY(WITHOUT VALVE)
PB0A	PB11A30AL(40LPM,7-210bar) (Pilot Operated Reducing)
PB0B	PB11A30BL(40LPM,3.5-105bar) (Pilot Operated Reducing)

Y SELECTION FOR G PORT

G02	G 1/4"(Metric)
N02	NPT 1/4"(U.S. Units)

Z BODY MATERIAL

A	HIGH-STRENGTH ALUMINUM
S	DUCTILE IRON