


Ordering Code: **MH03PPW-X-Y-Z 02**

Stack Height : 40.0mm

O-RING CODE NO. 4KAA012AA001

UNIT:mm

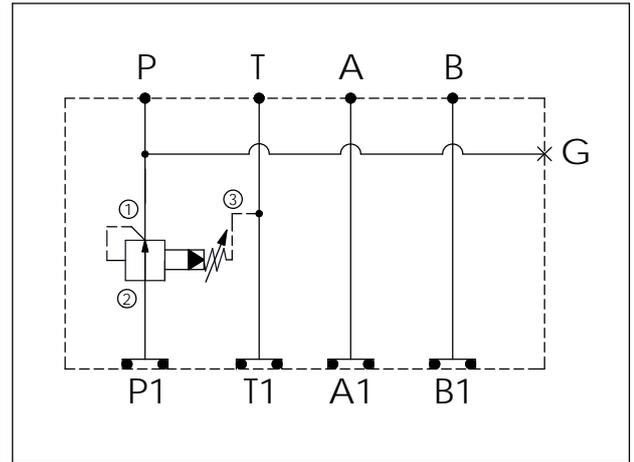

TECHNICAL DATA


Aluminum Body Pressure Rating: 250 bar
 Ductile Iron Body Pressure Rating: 350 bar

Rated flow: 40 l/min

Cartridge Valve:
 Refer to PB11A-X-Y-Z
 * Refer to Winner Cartridge Valves Catalog.

Aluminum	0.34 kg(WITHOUT VALVE) 0.5 kg(INCLUDE VALVE)
Ductile Iron	1.0 kg(WITHOUT VALVE) 1.16 kg(INCLUDE VALVE)

* If you need the special specification. Please contact us.

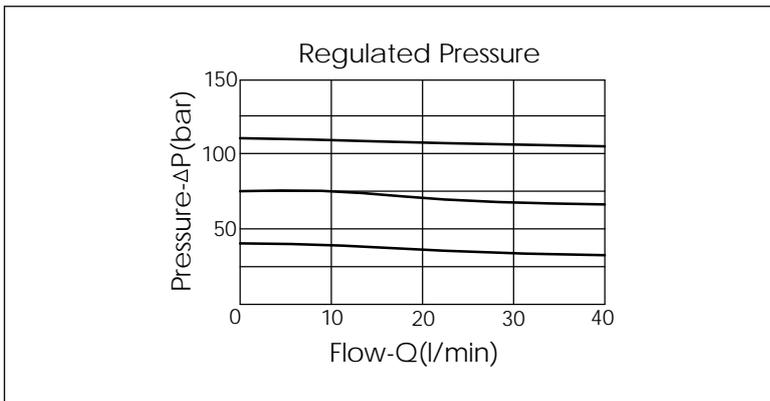

X	SELECTION FOR P PORT CONTROL	
11A3	CAVITY ONLY(WITHOUT VALVE)	
PB0A	PB11A30AL(40LPM,7-210bar) (Pilot Operated Reducing)	
PB0B	PB11A30BL(40LPM,3.5-105bar) (Pilot Operated Reducing)	

Y	SELECTION FOR G PORT	
G02	G 1/4"(Metric)	
N02	NPT 1/4"(U.S. Units)	

Z	BODY MATERIAL	
A	HIGH-STRENGTH ALUMINUM	
S	DUCTILE IRON	