

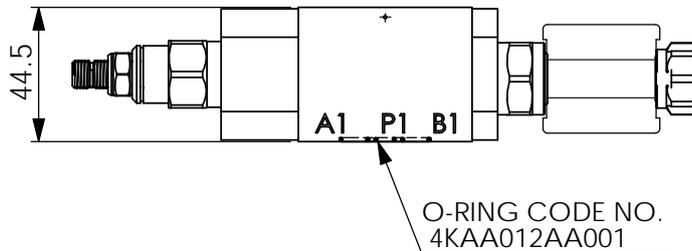
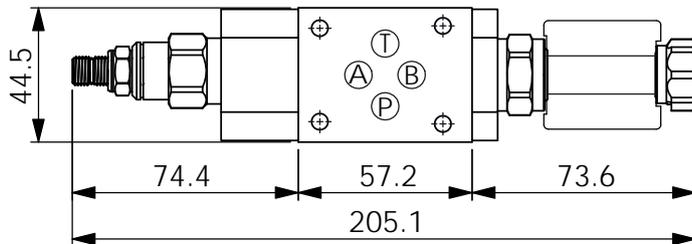


Ordering Code:	<b>MH03RAE-X-Y-Z01</b>
Stack Height :	44.5mm

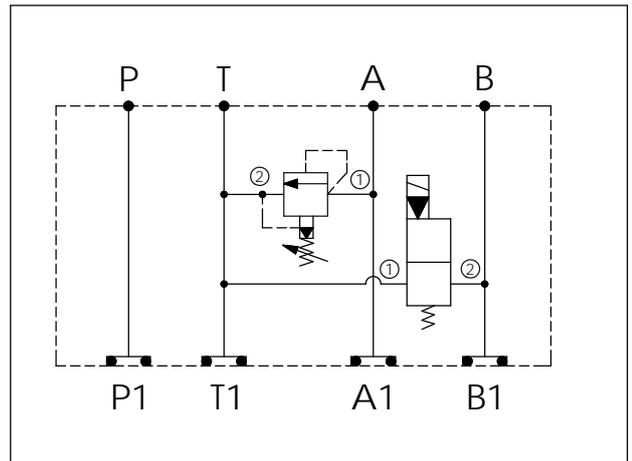

UNIT:mm



### TECHNICAL DATA

Aluminum Body Pressure Rating: 250 bar  
 Ductile Iron Body Pressure Rating: 350 bar


Rated flow: 40 l/min

Cartridge Valve:  
 Refer to RP10A-X-Y-Z  
 EP08W-X-Y-Z

\* Refer to Winner Cartridge Valve Catalog.

Aluminum	0.38 kg(WITHOUT VALVES)
	0.58 kg(INCLUDE VALVES ,WITHOUT COIL)
DUCTILE IRON	1.12 kg(WITHOUT VALVES)
	1.32 kg(INCLUDE VALVES ,WITHOUT COIL)

\* If you need the special specification. Please contact us.

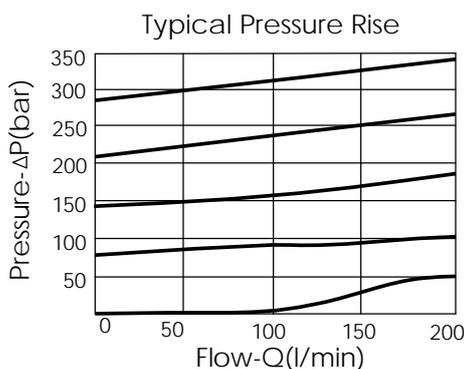

<b>X</b>	<b>SELECTION FOR A PORT CONTROL</b>	
<b>10A2</b>	CAVITY ONLY(WITHOUT VALVE)	
<b>RP0A</b>	RP10A20AL(95LPM,7-210bar)	

<b>Y</b>	<b>SELECTION FOR B PORT CONTROL</b>	
<b>08W2</b>	CAVITY ONLY(WITHOUT VALVE)	
<b>EP01</b>	EP08W2A01N05 , 40LPM,350bar (NORMALLY CLOSED,WITHOUT COIL)	
<b>EP01M</b>	EP08W2A01M05 , 40LPM,350bar(NORMALLY CLOSED WITH KNOB STYLE MANUAL OVERRIDE,WITHOUT COIL)	
<b>EP31</b>	EP08W2A31N05 , 40LPM,350bar (NORMALLY CLOSED,WITHOUT COIL)	
<b>EP31M</b>	EP08W2A31M05 , 40LPM,350bar(NORMALLY CLOSED WITH KNOB STYLE MANUAL OVERRIDE,WITHOUT COIL)	

<b>Z</b>	<b>BODY MATERIAL</b>	
<b>A</b>	HIGH-STRENGTH ALUMINUM	
<b>S</b>	DUCTILE IRON	