

### TECHNICAL DATA

Aluminum Body Pressure Rating: 250 bar  
 Ductile Iron Body Pressure Rating: 350 bar


Rated flow: 1 l/min

Cartridge Valve:  
 Refer to RD08W-X-Y-Z  
 PRB8A-X-Y-Z

\* Refer to Winner Cartridge Valves Catalog.

Aluminum	0.3 kg(WITHOUT VALVES) 0.56 kg(INCLUDE VALVES ,WITHOUT COIL)
----------	--

\* If you need the special specification.  
 Please contact us.

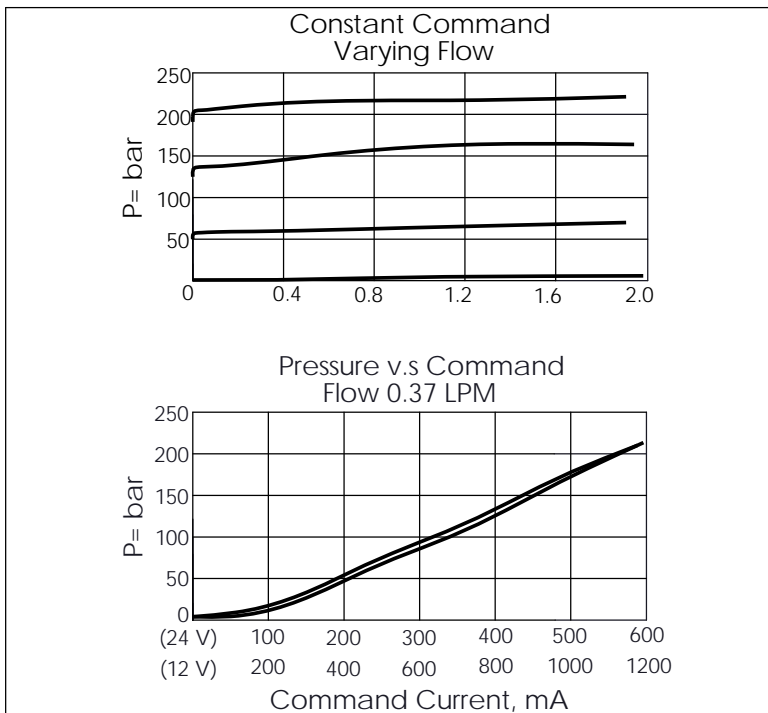

Y	SELECTION FOR ELECTRO-PROPORTIONAL PILOT RELIEF (PORT ① TO ② ,NEAR "B" PORT SIDE)
<b>8A2</b>	CAVITY ONLY(WITHOUT VALVE)
<b>PRBDA</b>	PRB8A2DAN(1LPM,20~210bar)
COIL MUST BE ORDERED SEPARATELY (REFER TO EC-19A-X-Y-Z)	

X	SELECTION FOR RELIEF VALVE (PORT ① TO ② ,NEAR "A" PORT SIDE)
<b>08W2</b>	CAVITY ONLY(WITHOUT VALVE)
<b>RD3A</b>	RD08W23AL(3LPM,35-210bar)

Z	BODY MATERIAL
<b>A</b>	HIGH-STRENGTH ALUMINUM