

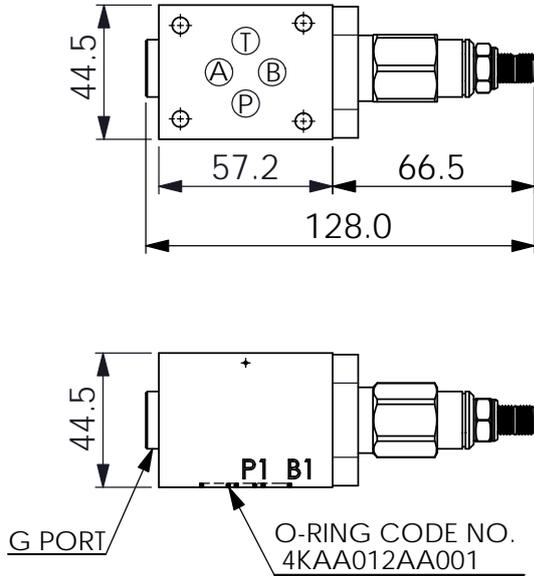


## ISO 03 SANDWICH MANIFOLD

Ordering Code:	<b>MH03RTH-X-Y-Z01</b>
Stack Height :	44.5mm

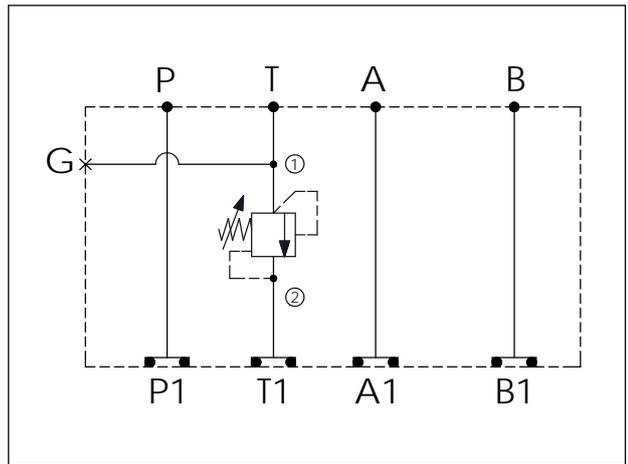

UNIT:mm



### TECHNICAL DATA


Aluminum Body Pressure Rating: 250 bar  
 Ductile Iron Body Pressure Rating: 350 bar

Rated flow: 40 l/min

Cartridge Valve:  
 Refer to RD10A-X-Y-Z  
 \* Refer to Winner Cartridge Valve Catalog.

Aluminum	0.28 kg(WITHOUT VALVE)
	0.42 kg(INCLUDE VALVE)
DUCTILE IRON	1.51 kg(WITHOUT VALVE)
	1.65 kg(INCLUDE VALVE)

\* If you need the special specification. Please contact us.

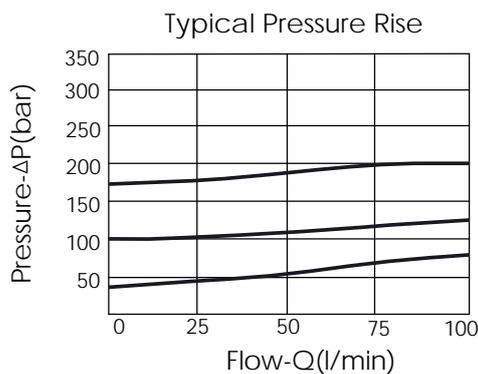

### X SELECTION FOR T PORT CONTROL

<b>10A2</b>	CAVITY ONLY(WITHOUT VALVE)
<b>RD5A</b>	RD10A25AL(95LPM,35-210bar)

### Y SELECTION FOR G PORT

<b>G02</b>	G 1/4"(Metric)
<b>N02</b>	NPT 1/4"(U.S. Units)

### Z BODY MATERIAL

<b>A</b>	HIGH-STRENGTH ALUMINUM
<b>S</b>	DUCTILE IRON