


Ordering Code: **MH05SBI-X-Y-Z 03**

Stack Height : 63.0mm


O-RING CODE NO.  
4KAA014AA001

UNIT:mm

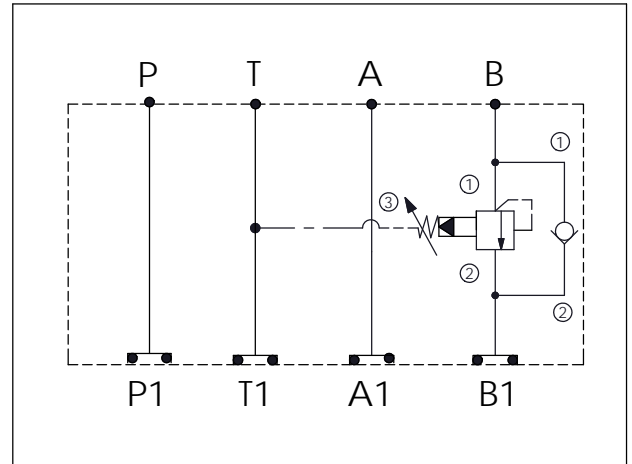

TECHNICAL DATA	
Aluminum Body Pressure Rating:	250 bar
Ductile Iron Body Pressure Rating:	350 bar
Rated flow:	80 l/min
Cartridge Valve:	Refer to CV5A-X-Y-Z SP2A-X-Y-Z
* Refer to Winner Cartridge Valves Catalog.	
Aluminum	0.95 kg(WITHOUT VALVES) 1.45 kg(INCLUDE VALVES)

\* If you need the special specification. Please contact us.

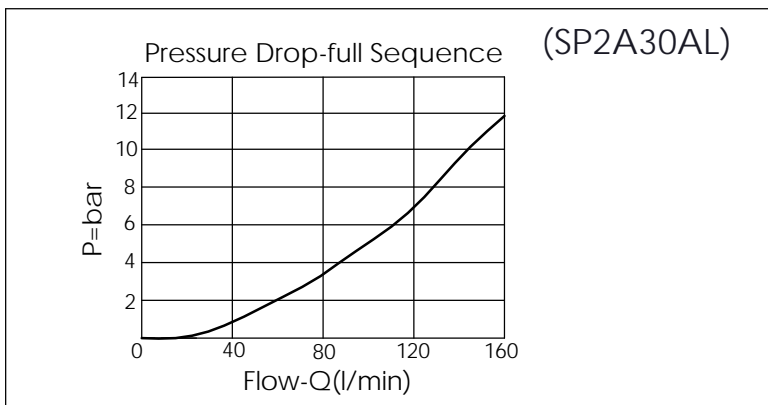

X	SELECTION FOR CHECK VALVE
5A2	CAVITY ONLY(WITHOUT VALVE)
CV20	CV5A2120N (120LPM , 2.0bar)

Y	SELECTION FOR B PORT CONTROL
2A3	CAVITY ONLY(WITHOUT VALVE)
SP0A	SP2A30AL (120LPM , 7-210bar)

Z	BODY MATERIAL
A	HIGH-STRENGTH ALUMINUM